



MEAN WELL OWA-90E Series 90W Single Output Moistureproof Adaptor Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL OWA-90E Series 90W Single Output Moistureproof Adaptor Owner's Manual 

Contents

- [1 MEAN WELL OWA-90E Series 90W Single Output Moistureproof Adaptor](#)
- [2 Product Information](#)
- [3 Features](#)
- [4 Applications](#)
- [5 Description](#)
- [6 SPECIFICATION](#)
- [7 Block Diagram](#)
- [8 Derating Curve](#)
- [9 Static Characteristics](#)
- [10 Mechanical Specification](#)
- [11 Output Plug Assignment](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)
- [13 Related Posts](#)



MEAN WELL OWA-90E Series 90W Single Output Moistureproof Adaptor



Product Information

Specifications

Model	DC Voltage	Rated Current	Rated Power	Ripple & Noise (max.)	Line Regulation	Load Regulation	Setup, Rise Time	Hold Up Time (Typ.)	Voltage Range	Frequency Range	Power Factor (Typ.)	Input Efficiency (Typ.)	AC Current (Typ.)	Inrush Current (Typ.)	Leakage Current
OWA-90E-12	12V	7.5A	90W	150mV p-p	—	—	500ms, 80ms at 95% load 115VAC / 230VAC	16ms at full load 115VAC / 230VAC	90 ~ 264V AC 127 ~ 370V DC	47 ~ 63 Hz	PF>0.98/115VAC, PF>0.96/230VAC at full load	89%	0.95A / 115VAC 0.5A / 230VAC	COLD START 60A(twidth =550s measured at 50% lpeak) at 230VAC	—
OWA-90E-15	15V	6A	90W	150mV p-p	—	—	500ms, 80ms at 95% load 115VAC / 230VAC	16ms at full load 115VAC / 230VAC	90 ~ 264V AC 127 ~ 370V DC	47 ~ 63 Hz	PF>0.98/115VAC, PF>0.96/230VAC at full load	90%	0.95A / 115VAC 0.5A / 230VAC	COLD START 60A(twidth =550s measured at 50% lpeak) at 230VAC	—
OWA-90E-20	20V	4.5A	90W	150mV p-p	—	—	500ms, 80ms at 95% load 115VAC / 230VAC	16ms at full load 115VAC / 230VAC	90 ~ 264V AC 127 ~ 370V DC	47 ~ 63 Hz	PF>0.98/115VAC, PF>0.96/230VAC at full load	90%	0.95A / 115VAC 0.5A / 230VAC	COLD START 60A(twidth =550s measured at 50% lpeak) at 230VAC	—

OWA-90E-24	24 V	3.75 A	90 W	150 mV p-p	—	—	500ms, 80ms at 95% load 115VAC / 230VAC	16ms at full load 115VAC / 230VAC	90 ~ 264V AC 127 ~ 370V DC	47 ~ 63 Hz	PF>0.98/ 115VAC, PF>0.96/ 230VAC at full load	90 %	0.95A / 115VAC 0.5A / 230VAC	COLD START 60A(twidth =550s measured at 50% lpeak) at 230VAC	—
OWA-90E-30	30 V	3 A	90 W	200 mV p-p	—	—	500ms, 80ms at 95% load 115VAC / 230VAC	16ms at full load 115VAC / 230VAC	90 ~ 264V AC 127 ~ 370V DC	47 ~ 63 Hz	PF>0.98/ 115VAC, PF>0.96/ 230VAC at full load	90 %	0.95A / 115VAC 0.5A / 230VAC	COLD START 60A(twidth =550s measured at 50% lpeak) at 230VAC	—
OWA-90E-36	36 V	2.5 A	90 W	200 mV p-p	—	—	500ms, 80ms at 95% load 115VAC / 230VAC	16ms at full load 115VAC / 230VAC	90 ~ 264V AC 127 ~ 370V DC	47 ~ 63 Hz	PF>0.98/ 115VAC, PF>0.96/ 230VAC at full load	91 %	0.95A / 115VAC 0.5A / 230VAC	COLD START 60A(twidth =550s measured at 50% lpeak) at 230VAC	—
OWA-90E-42	42 V	2.15 A	90.3 W	250 mV p-p	—	—	500ms, 80ms at 95% load 115VAC / 230VAC	16ms at full load 115VAC / 230VAC	90 ~ 264V AC 127 ~ 370V DC	47 ~ 63 Hz	PF>0.98/ 115VAC, PF>0.96/ 230VAC at full load	91 %	0.95A / 115VAC 0.5A / 230VAC	COLD START 60A(twidth =550s measured at 50% lpeak) at 230VAC	—
OWA-90E-48	48 V	1.88 A	90.24 W	250 mV p-p	—	—	500ms, 80ms at 95% load 115VAC / 230VAC	16ms at full load 115VAC / 230VAC	90 ~ 264V AC 127 ~ 370V DC	47 ~ 63 Hz	PF>0.98/ 115VAC, PF>0.96/ 230VAC at full load	91 %			

Features

- Universal AC input / Full range
- Built-in active PFC function
- High efficiency up to 91%
- No load power consumption<0.15W
- Energy efficiency Level VI
- Comply with EU ErP and meet CoC Version 5
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Class II power unit, no FG
- Fanless design, cooling by free air convection
- 5 years warranty

Applications

- Robotic lawn mower
- Household appliance
- Battery charging
- General electronic products in dusty or humid environment

GTIN CODE


- MW Search: <https://www.meanwell.com/serviceGTIN.aspx>



Description

OWA-90E is a 90W AC/DC, class II (without earth pin) external power supply series pinpointing the moistureproof feature. The fully-potted silicone inside the plastic enclosure enhances the heat dissipation; it also benefits that the OWA-90E is approved for IP67 level so that this series specializes the application in which the damp, humidity or dust resistance is needed for the external power supply. OWA-90E follows the latest energy efficiency demand, and is compliant with EU ErP and meets Code of Conduct(CoC) Version 5; the no load power consumption is less than 0.15W. It is certified with EN 61558-2-16; moreover, the compliance to EN 60335-1 for selected models can greatly simplify the system design such as household appliances. OWA-90E adopts the universal input range from 90 VAC to 264VAC, and incorporates a built-in PFC function. With a working efficiency up to 91%, OWA-90E is cooled by free air convection; the working temperature ranges from -40°C to +70°C.

Model Encoding

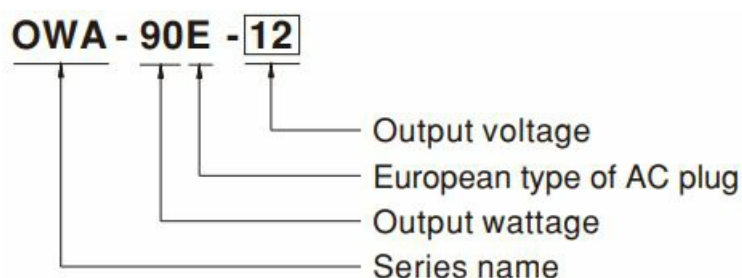


SPECIFICATION


MODEL		OWA-90E-12	OWA-90E-15	OWA-90E-20	OWA-90E-24	OWA-90E-30	OWA-90E-36	OWA-90E-42	OWA-90E-48	OWA-90E-54
OUTPUT	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
	RATED CURRENT	7.5A	6A	4.5A	3.75A	3A	2.5A	2.15A	1.88A	1.67A
	RATED POWER	90W	90W	90W	90W	90W	90W	90.3W	90.24W	90.18W
	RIPPLE & NOISE (max.) Note.2	150mV p-p	150mV p-p	150mV p-p	150mV p-p	200mV p-p	200mV p-p	250mV p-p	250mV p-p	350mV p-p
	VOLTAGE TOLERANCE Note.3	±4.0%	±4.0%	±4.0%	±3.0%	±3.0%	±2.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME Note.4	500ms, 80ms at 95% load 115VAC / 230VAC								
	HOLD UP TIME (Typ.)	16ms at full load 115VAC / 230VAC								
INPUT	VOLTAGE RANGE	90 ~ 264VAC 127 ~ 370VDC								
	FREQUENCY RANGE	47 ~ 63Hz								
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.96/230VAC at full load								
	EFFICIENCY (Typ.)	89%	90%	90%	90%	90%	91%	91%	91%	91%
	AC CURRENT (Typ.)	0.95A / 115VAC 0.5A / 230VAC								
	INRUSH CURRENT (Typ.)	COLD START 60A(twidth=550μs measured at 50% Ipeak) at 230VAC								
	LEAKAGE CURRENT	<0.25mA / 240VAC								
PROTECTI	OVERLOAD	105 ~ 115%								
		Protection type : Hiccup mode, recovers automatically after fault condition is removed								
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed								
		15 ~ 17V	17.5 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 40V	41 ~ 46V	46 ~ 54V	54 ~ 60V	59 ~ 66V

ON	OVER VOLTAGE	Protection type : Shut down o/p voltage, re-power on to recover
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover
ENVIRONMENT	WORKING TEMP.	-40 ~ +70°C (Refer to “Derating Curve”)
	WORKING HUMIDITY	20 ~ 95% RH non-condensing
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes
SAFETY & EMC	SAFETY STANDARDS	EN61558-1,-2-16 listed; EN60335-1 listed(except for OWA-90E-42,48,54); EAC T P TC 004,IP67 approved
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH
	EMC EMISSION	Compliance to EN55032 (CISPR32) Class B, EN55014-1,EN61000-3-2,-3;EAC T P TC 020
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55035, EN55014-2, light industry level (surge L- N : 2KV), EAC TP TC 020
OTHERS	MTBF	3044.3K hrs min. Telcordia SR-332 (Bellcore) 292.9K hrs min. MIL-HDBK-217F (25°C)
	DIMENSION	171*63*37.5mm
	PACKING	0.92Kg; 16pcs/15.7Kg/1.01CUFT
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.</p> <p>* Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p>	


Block Diagram

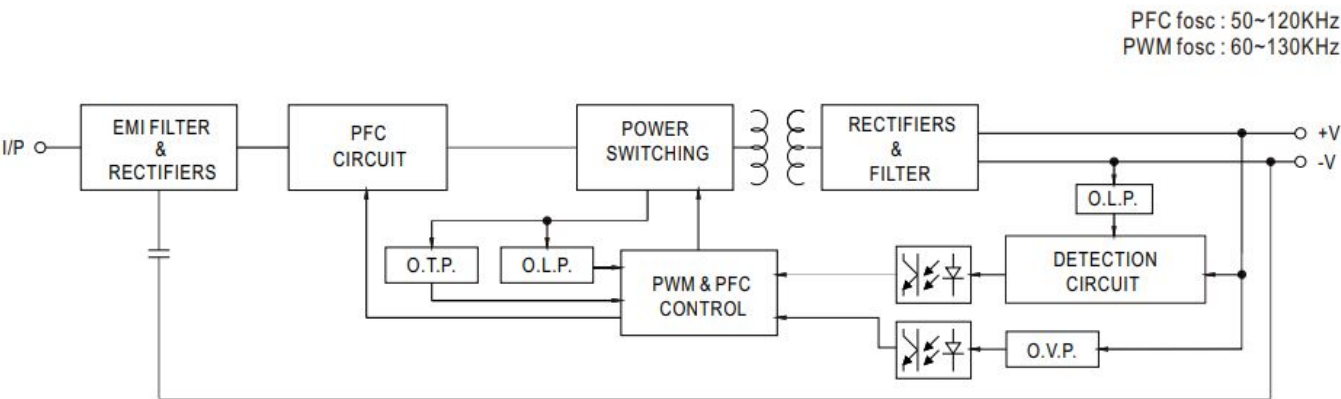


Derating Curve

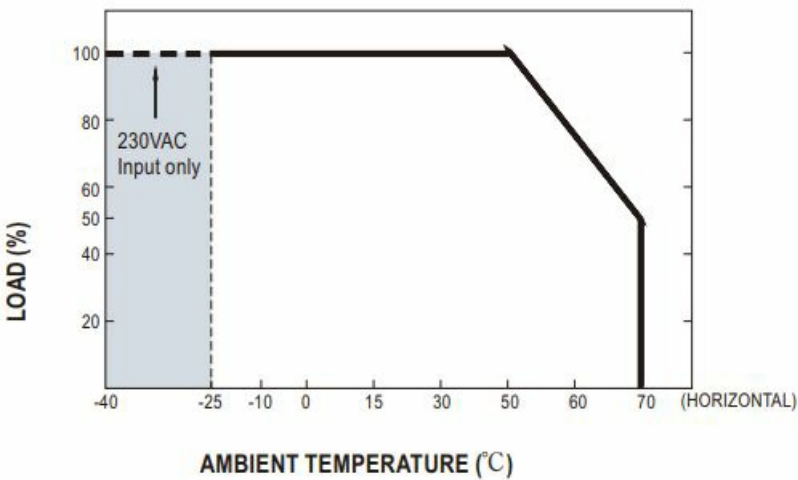

Static Characteristics

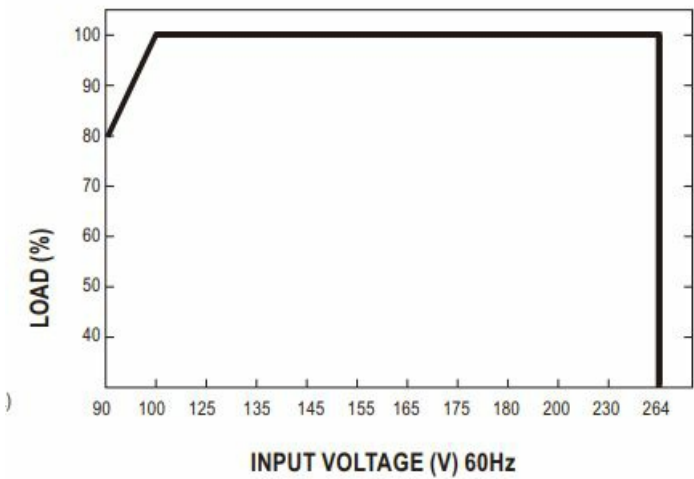


Mechanical Specification

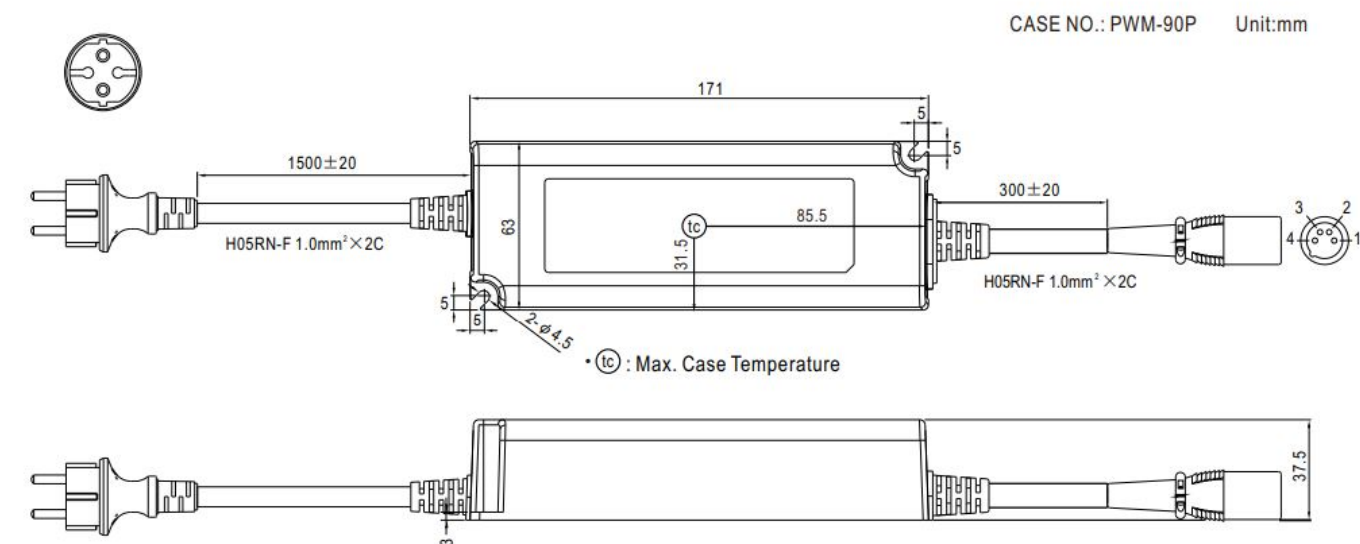

Input Plug Type

- All standard models: CEE 7/7



Output Plug Assignment

Model Category	Plug Description	Plug Picture	PIN NO.	OUTPUT
For standard model	XLR 4P, NEUTRIK NC4MX, or equivalent		1,2	+V
			3,4	-V
For optional model	Lumberg 3611 03, or equivalent		1	+V
			2	float
			3	-V
For optional model	XLR 3P, NEUTRIK NC3MX, or equivalent		1	+V
			2,3	-V
For optional model	CHOGORI 22002411-01 or equivalent		1	+V
			2	-V
For optional model	Unicable UT-D170F4-2P or equivalent		1	+V
			2	-V
For optional model	Unicable UT-D224-2P or equivalent		1	+V
			2	-V
For optional model	2.1φ x 5.5φ x 11 mm, center +, tuning fork type	 Outside ⊖ ⊕ Inside	CENTER	+V

Recommend Mounting Direction




Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>

- Arrow.com.

Documents / Resources

	<p>MEAN WELL OWA-90E Series 90W Single Output Moistureproof Adaptor [pdf] Owner's Manual</p> <p>OWA-90E Series 90W Single Output Moistureproof Adaptor, OWA-90E Series, 90W Single Output Moistureproof Adaptor, Output Moistureproof Adaptor, Moistureproof Adaptor, Adaptor</p>
--	---

References

- [TÜV Rheinland - Home | US | TÜV Rheinland](#)
- [MEAN WELL Installation Manual-MEAN WELL Switching Power Supply Manufacturer](#)
- [MEAN WELL Product Liability Disclaimer-MEAN WELL Switching Power Supply Manufacturer](#)
- [MEAN WELL Global Trade Item Number \(GTIN\)-MEAN WELL Switching Power Supply Manufacturer](#)
- [User Manual](#)