

MiraScreen Doando Wireless HD Transmitter and Receiver Kit **User Manual**

Home » MiraScreen » MiraScreen Doando Wireless HD Transmitter and Receiver Kit User Manual

MiraScreen Doando Wireless HD Transmitter and Receiver Kit



Contents


- 1 Preface
- **2 Connection Diagram**
- **3 Hardware Casting**
- **4 Pairing Instructions**
- **5 Problem Solving**
- 6 Documents /
- Resources
- **7 Related Posts**

Preface


Thank you for purchasing the MiraScreen products, For optimum operation, please read this manual carefully before use.

Connection Diagram

Receiver -RX

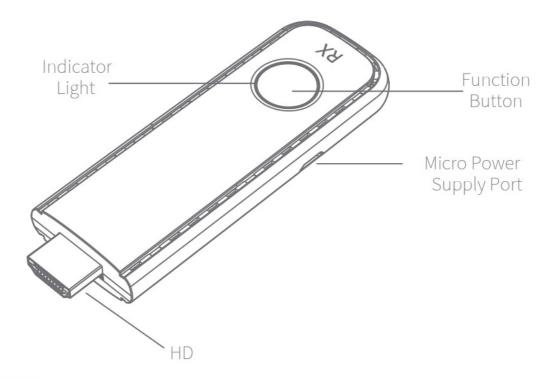

Transmitter -TX

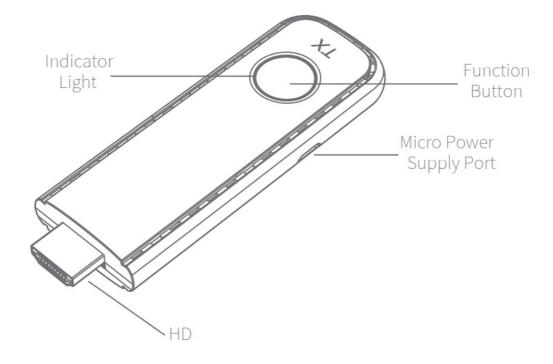

Hardware Casting

Combination of receiver and transmitter, plug and play




- 1. Connect the HD port of the receiver to the video input port of the display device such as the monitor or TV.
- 2. Connect the Micro power supply port of the receiver to the charging cable and plug it into the power adapter (Voltage above 5V, current above 2A). Turn on the Receiver power switch.
- 3. Adjust the HD Signal source of the monitor or TV to the corresponding HD port untithe boot screen is displayed.
- 4. Connect the transmitter to the computer or other devices With HD video output function. After the indicator Light enters the fast flash state, Wait for ten seconds to complete Casting.

Pairing Instructions

The product has been paired out of the factory. In case of pairing failure due to improper operation or other circumstances during use, it is necessary to restore and re pair the device as follows:

^{*}Please make sure that the power of the computer is sufficient. If the power supply of the computer is insufficient or HD is unable to supply power , please connect the transmitter to the power adapter or Micro power supply port (Voltage above 5V , current above 2A)

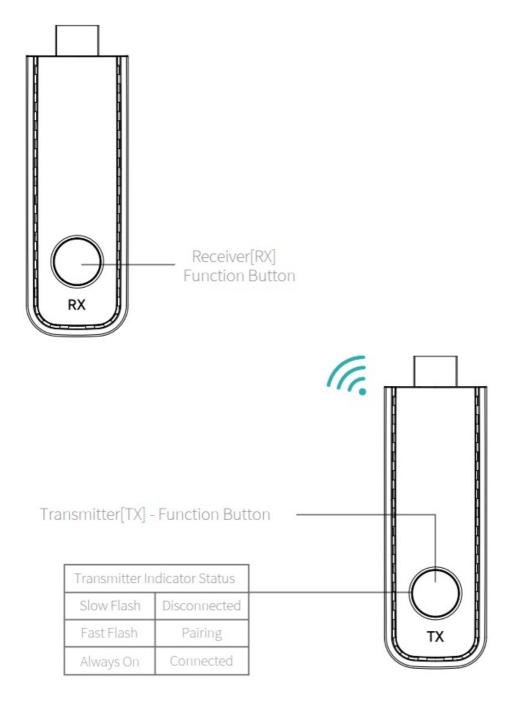

- 1. Please Press the receiver function button for more than 3 seconds, and the prompt will pop up on the interface : Release the button to pair With Ez cast TX. Wait for the transmitter to enter pairing mode
- 2. Press the transmitter function button for more than 5 seconds, the indicator will flash for pairing, and Wait for the transmitter indicator to be always on, indicating that the connection is successful.

Problem Solving

Q: How to restore factory settings?

A: When the product fails, press and hold the receiver function button for 10 seconds. After a black screen appears and restart, the factory settings will be restored.

Q: Can devices without HD interface be used?

A: Yes, please use the device with an HD interface converter.

Q: How to enter privacy mode?

A: Tap the transmitter function button to disconnect or reconnect.

Waning:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful inter refence in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception. which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE: This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter

RF Exposure Statement (Only for RX

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

Documents / Resources



MiraScreen Doando Wireless HD Transmitter and Receiver Kit [pdf] User Manual G69, 2AZDX-G69, 2AZDXG69, Doando, Doando Wireless HD Transmitter and Receiver Kit, Wi reless HD Transmitter and Receiver Kit, HD Transmitter and Receiver Kit, Receiver Kit

Manuals+,