



Modbus CMMB102 Dual Mini I/O Module User Guide

[Home](#) » [Modbus](#) » Modbus CMMB102 Dual Mini I/O Module User Guide 



CMMB102
Dual Mini I/O Module

Contents

[1 CMMB102 Dual Mini I/O](#)

[Module](#)

[2 FEATURES](#)

[3 NETWORK COMMUNICATION](#)

[4 APPLICATION EXAMPLE](#)

[5 Documents / Resources](#)

[6 Related Posts](#)

CMMB102 Dual Mini I/O Module

The CMMB102 expands your BMS system over the BACnet or Modbus network when your application requires additional inputs and outputs on a physical controller. It provides simple expansion of a new or existing controller and reduces unnecessary costs of additional components. On-board LEDs help track and diagnose any input and output activity during operation.

FEATURES

Power & Communication

- 24Vac or 24Vdc supply
- BACnet® MS/TP port or Modbus communication port (selectable)

Inputs & Outputs

- 4 universal inputs
- 2 universal outputs (supervised)
- 2 binary outputs (supervised)

Installation

- 4 override switches to manually control each output
- LED status indication of each input and output
- DIN rail mounting
- Removable, non-strip, raising clamp terminals
- Removable see-through panel for easy access to DIP switches

NETWORK COMMUNICATION


- BACnet® MS/TP or Modbus communication port (selectable via DIP switch)
- Select MAC address via DIP switch or via network BACnet®
- MS/TP @ 9600, 19200, 38400 or 76800 bps
- Automatic baud rate detection
- Automatic device instance configuration
- Copy & broadcast configuration to other CMMB modules

Modbus

- Modbus @ 9600, 19200, 38400 or 57600 bps
- RTU Slave, 8 bits (configurable parity and stop bits)
- Connects to any Modbus master

APPLICATION EXAMPLE

CONNECTION VIA BACNET MS/TP

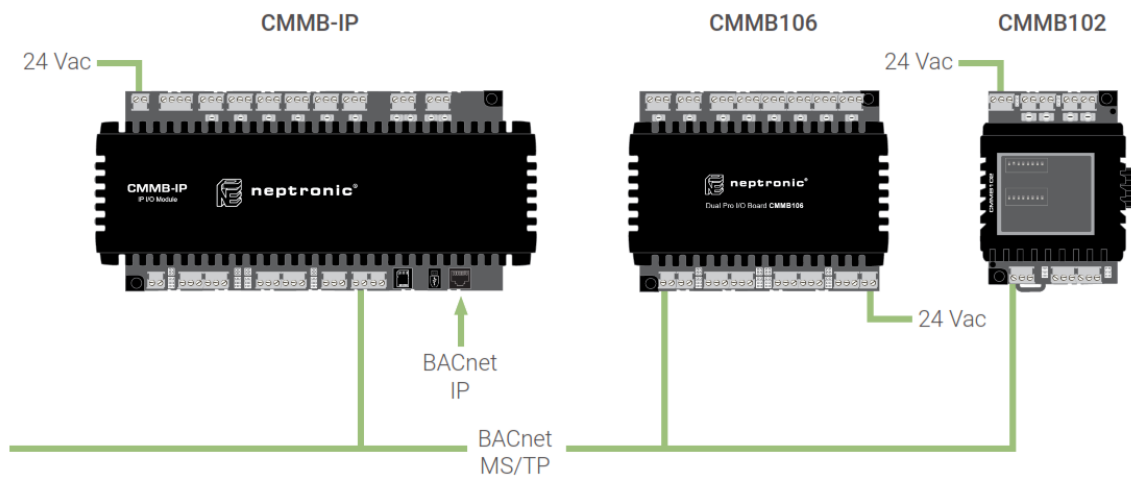

Flyer_CMMB102_EFL_210705

neptronic.com

514-333-1433

contact@neptronic.com

Documents / Resources

	Modbus CMMB102 Dual Mini I/O Module [pdf] User Guide CMMB102 Dual Mini I O Module, CMMB102, Dual Mini I O Module, Mini IO Module, Mini Modul e, Dual Module
---	---