



MURPHY DOOR 2024 Signature Floating Shelf Instructions

[Home](#) » [MURPHY DOOR](#) » MURPHY DOOR 2024 Signature Floating Shelf Instructions 



MURPHY DOOR[®]

Signature Floating Shelf
murphydoor.com | 888.458.5911



Contents

- [1 2024 Signature Floating Shelf](#)
- [2 Documents / Resources](#)
 - [2.1 References](#)







2024 Signature Floating Shelf



PLEASE READ INSTRUCTIONS FULLY BEFORE YOU BEGIN ASSEMBLY

Tools Needed

- Safety glasses
- Measuring tape
- Pencil or something to mark the wall
- Stud finder
- Level
- Drill
- Phillips head driver bit
- 1/8" drill bit
- Philips head screwdriver
- Adjustable (Crescent) Wrench

Wall Plate	
Shelf Arm 18" Hardware – x2 34" and 52" Hardware – x4	
Shelf Slide 18" Hardware – x2 34" and 52" Hardware – x4	
3" Lag Screw 18" Hardware – x4 34" Hardware – x6 52" Hardware – x8	
Wall Anchor All Hardware – x4	
#8 x 1" Screw All Hardware – x4	

Determine where you want to place your shelf.

Make sure the wall is suitable for hanging the shelf. The wall should have either 2x4 or 2x6 construction. You will need to secure the hardware to at least 1 wood stud, more are preferred.

Determine the height you want the top of your shelf, and measure down 3/8". This will mark the top of the wall plate for the mounting hardware.



Using a stud finder locate and mark the studs.

*If you are mounting to a single stud or the ends of the wall plate are more than 2" (2 mounting holes) away from the nearest stud, the ends of the wall plate will need to be secured with wall anchors.



Using a drill, with a Phillips head driver, attach the wall plate using one of the 3" screws into one of the studs just tight enough that the wall plate can still be rotated by hand.




****FOR WALL ANCHORS ONLY****

Level the wall plate and mark the wall at the mounting holes at each end of the hardware. Use a 1/8" drill bit and drill all marked locations.




The wall anchors provided are self-drilling. Align the drilling point of the anchor with the pilot hole and use a Phillips head screwdriver to drive the anchor into the wall until it stops.

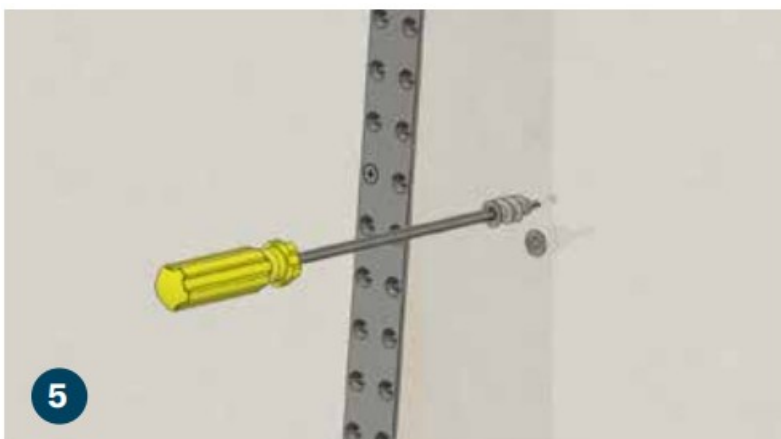


Level the wall plate and finish securing the shelf to the wall using additional 3" lag screws at each stud location

and 1" screws at each wall anchor.

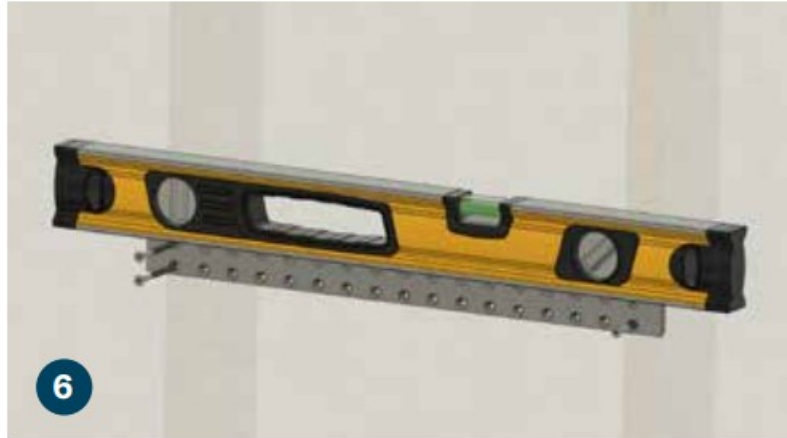


Make sure all screws are fully tightened.

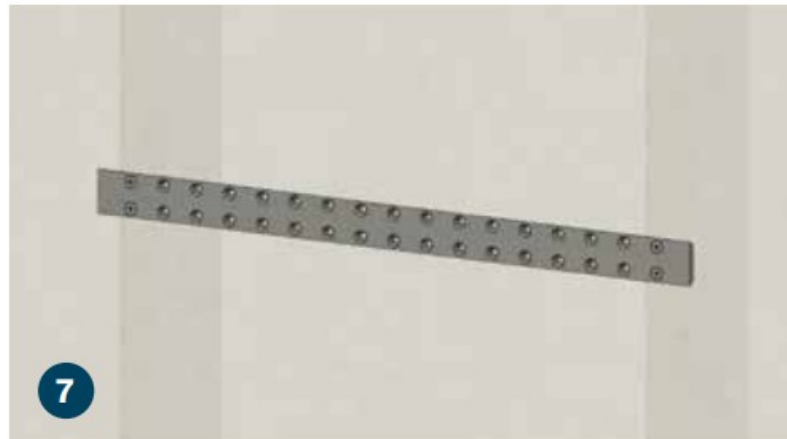

Thread the shelf arms into the slides.



Slide them onto the wall plate.

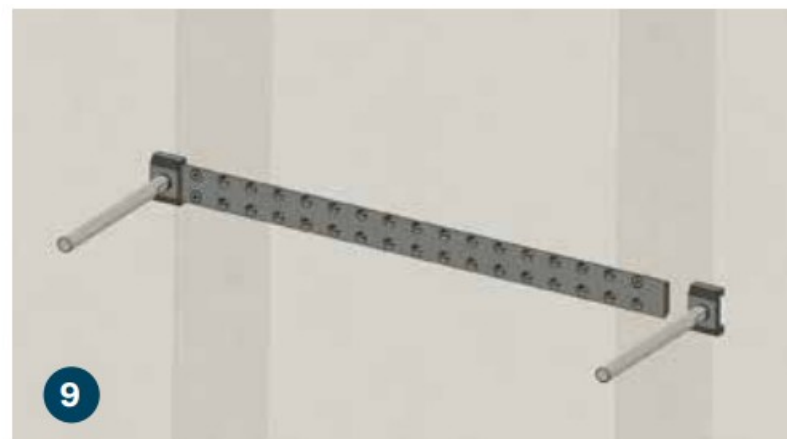

Align the arms with the holes in the back of your shelf and slide the shelf all the way against the wall.



Adjust the shelf side to side until it is where you want it.



Pull the shelf back out from the wall 2-3".



Locate the two flat sections near the base of each arm and use an adjustable wrench to turn them clockwise to tighten them into the slide and lock the arm in place.



After doing this at each arm, slide the shelf back against the wall.

Congratulations.

You have successfully installed your Signature Floating Shelf.




MURPHY DOOR®

888.458.5911

murphydoor.com

Documents / Resources



[MURPHY DOOR 2024 Signature Floating Shelf](#) [pdf] Instructions

2024, 07, 12, 2024 Signature Floating Shelf, 2024, Signature Floating Shelf, Floating Shelf, Shelf

References

- [Hidden Doors | Hidden Bookcase Door | Secret Bookshelf Door – Murphy Door®](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.