



netvox R313A Wireless Door/Window Sensor User Manual

[Home](#) » [netvox](#) » netvox R313A Wireless Door/Window Sensor User Manual 

Contents

- [1 netvox R313A Wireless Door/Window Sensor](#)
- [2 Introduction](#)
- [3 Appearance](#)
- [4 Main Features](#)
- [5 Set up Instruction](#)
- [6 Data Report](#)
- [7 Installation](#)
- [8 Important Maintenance Instruction](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)

netvox[®]

netvox R313A Wireless Door/Window Sensor



Copyright©Netvox Technology Co., Ltd.

This document contains proprietary technical information which is the property of NETVOX Technology. It shall be maintained in strict confidence and shall not be disclosed to other parties, in whole or in part, without written permission of NETVOX Technology. The specifications are subject to change without prior notice.

Introduction

R313A is a long-distance window/door sensor based on the LoRaWAN open protocol (Class A).

LoRa Wireless Technology:

LoRa is a wireless communication technology famous for its long-distance transmission and low power consumption. Compared with other communication methods, LoRa spread spectrum modulation technique greatly extend the communication distance. It can be widely used in any use case that requires long-distance and low-data wireless communications. For example, automatic meter reading, building automation equipment, wireless security systems, industrial monitoring. It has features like small size, low power consumption, long transmission distance, strong anti-interference ability and so on.

LoRaWAN:

LoRaWAN uses LoRa technology to define end-to-end standard specifications to ensure interoperability between devices and gateways from different manufacturers.

Appearance



Main Features

- Compatible with LoRaWAN
- 2 sections of 3V CR2450 button battery power supply
- Reed switch status detection
- Simple operation and setting
- Protection level IP30
- Compatible with LoRaWANTM Class A
- Frequency hopping spread spectrum technology
- Configuration parameters can be configured through third-party software platforms, data can be read and alarms can be set via SMS text and email (optional)
- Available third-party platform: Actility / ThingPark, TTN, MyDevices/Cayenne
- Low power consumption and long battery life

Note: Battery life is determined by the sensor reporting frequency and other variables, please refer to http://www.netvox.com.tw/electric/electric_calc.html On this website, users can find battery life time for varied models at different configurations.

Set up Instruction

On/Off

Power on	Insert batteries. (users may need a flat blade screwdriver to open); Insert two sections of 3V CR2450 button batteries and close the battery cover.)
Turn on	Press any function key till green and red indicator flashes once.
Turn off (Restore to factory setting)	Press and hold the function key for 5 seconds till green indicator flashes for 20 times.
Power off	Remove Batteries.
Note:	<ol style="list-style-type: none"> 1. Remove and insert the battery; the device memorizes previous on/off state by default. 2. On/off interval is suggested to be about 10 seconds to avoid the interference of capacitor inductance and other energy storage components. 3. Press any function key and insert batteries at the same time; it will enter engineer testing mode.

Network Joining

Never joined the network	Turn on the device to search the network. The green indicator stays on for 5 seconds: success The green indicator remains off: fail
Had joined the network	Turn on the device to search the previous network. The green indicator stays on for 5 seconds: success The green indicator remains off: fail

Function Key

Press and hold for 5 seconds	Restore to factory setting / Turn off The green indicator flashes for 20 times: success The green indicator remains off: fail
Press once	The device is in the network: green indicator flashes once and sends a report The device is not in the network: green indicator remains off

Sleeping Mode

The device is on and in the network	Sleeping period: Min Interval. When the report change exceeds setting value or the state changes: send a data report according to Min Interval.
-------------------------------------	--

Low Voltage Warning

Low Voltage	2.4V
-------------	------

Data Report

The device will immediately send a version packet report along with an uplink packet including reed switch status and battery voltage.

Data will be reported by default setting before any configuration.

Default setting:

Maximum time: 3600s

Minimum time: 3600s (Detect the current voltage value every 3600s by default setting)

Battery change : 0x01 (0.1V)

R313A status:

When the R313A status changes, it will send a warning report.

Window/Door sensor open : 1

Window/Door sensor close : 0

The reported data is decoded by the Netvox LoRaWAN Application Command document and

<http://loraresolver.netvoxcloud.com:8888/page/index>

Data report configuration and sending period are as following:

Min Interval (Unit:second)	Max Interval (Unit:second)	Reportable Change	Current Change≥ Reportable Change	Current Change Reportable Change
Any number between n 1~65535	Any number between n 1~65535	Can not be 0.	Report per Min Inter val	Report per Max Inte rval

Example of ConfigureCmd

FPort 0x07

Bytes	1	1	Var (Fix =9 Bytes)
	CmdID	DeviceType	NetvoxPayLoadData

CmdID– 1 byte

DeviceType– 1 byte – Device Type of Device

NetvoxPayLoadData– var bytes (Max=9bytes)

Descripti on	Device	Cmdl D	Device Type	NetvoxPayLoadData			
Config R eportReq	R313A	0x01	0x02	MinTime (2bytes Unit:s)	MaxTime (2byte s Unit:s)	Battery Change (1byte Unit:0.1v)	Reserved (4Byt es,Fixed 0x00)
Config R eportRsp		0x81		Status (0x00_success)		Reserved (8Bytes,Fixed 0x00)	
ReadCon fig Repor tReq		0x02		Reserved (9Bytes, Fixed 0x00)			
ReadCon fig Repor tRsp		0x82		MinTime (2bytes Unit: s)	MaxTime (2byte s Unit: s)	Battery Change (1byte Unit:0.1v)	Reserved (4Byt es,Fixed 0x00)

(1) Command Configuration:


MinTime = 1min MaxTime = 1min BatteryChange = 0.1v
Downlink 0102003C003C0100000000 003C(Hex) = 60(Dec)
Response
8102000000000000000000 Configuration success
8102010000000000000000 Configuration failure

(2)Read Configuration:

Downlink 0202000000000000000000
Response
8202003C003C0100000000 Current configuration

Example for MinTime/MaxTime logic:


Example#1 based on MinTime = 1 Hour, MaxTime= 1 Hour, Reportable Change i.e. BatteryVoltageChange=0.1V

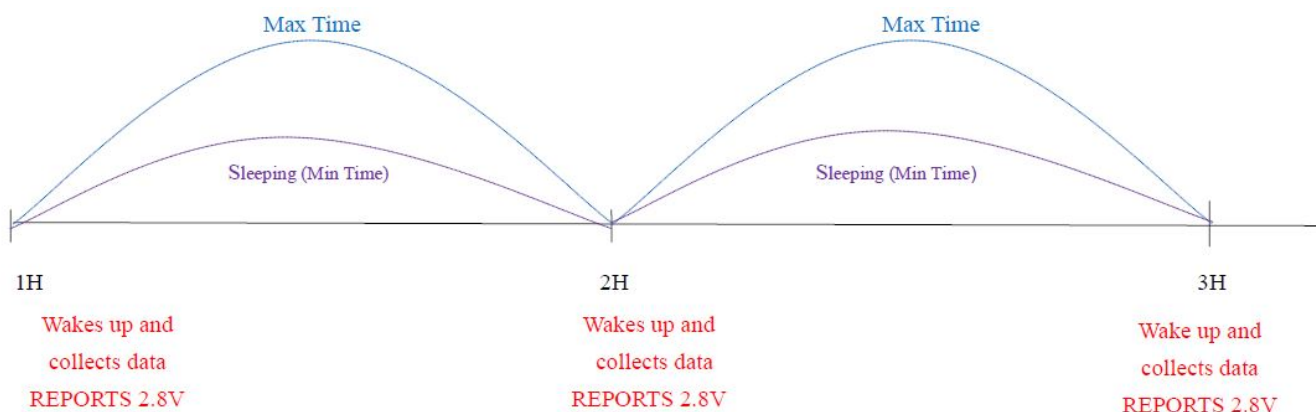


Note: MaxTime=MinTime. Data will only be report according to MaxTime (MinTime) duration regardless BatteryVoltageChange value.

Example#2 based on MinTime = 15 Minutes, MaxTime= 1 Hour, Reportable Change i.e. BatteryVoltageChange=

0.1V.

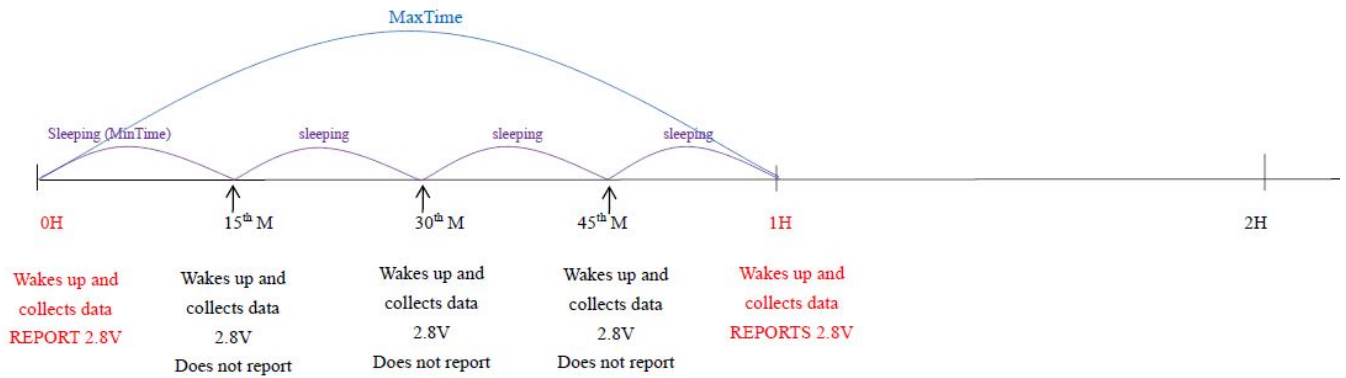

Example#3 based on MinTime = 15 Minutes, MaxTime= 1 Hour, Reportable Change i.e. BatteryVoltageChange= 0.1V.

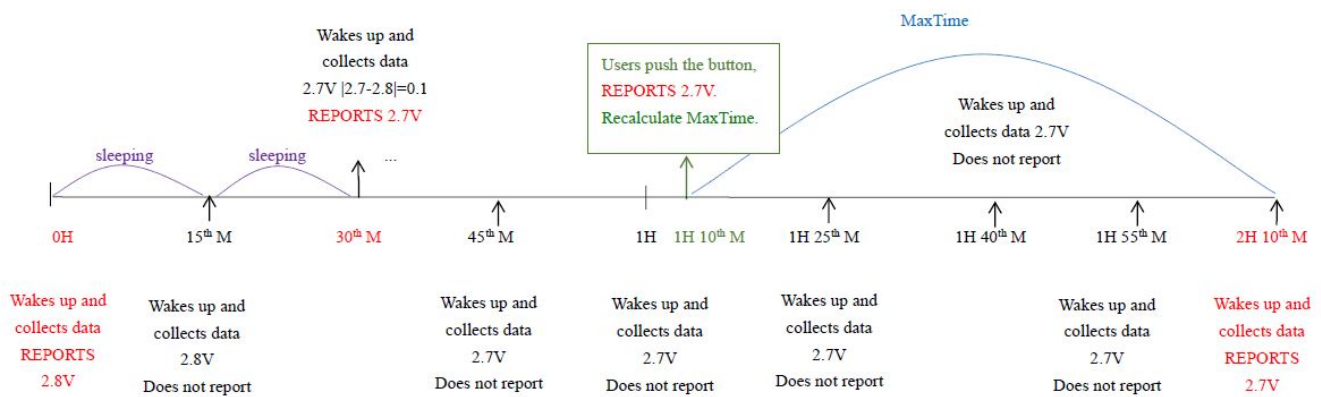


Note:


1. The device only wakes up and performs data sampling according to MinTime Interval. When it is sleeping, it does not collect data.
2. The data collected is compared with the last data reported. If the data change value is greater than the ReportableChange value, the device reports according to MinTime interval. If the data variation is not greater than the last data reported, the device reports according to MaxTime interval.
3. We do not recommend to set the MinTime Interval value too low. If the MinTime Interval is too low, the device wakes up frequently and the battery will be drained soon.
4. Whenever the device sends a report, no matter resulting from data variation, button pushed or MaxTime interval, another cycle of MinTime / MaxTime calculation is started.

Installation


1. This product does not have a waterproof function. After the screening is completed, please place it indoors.
2. The door magnetic magnet part and the body part are installed on both sides of the door joint or the window joint, and the distance between the two needs to be less than 2cm ; the dust in the installation position of the equipment needs to be wiped clean and then affixed to the equipment.
3. The battery installation method is shown in the figure below (battery with "+" facing outward).

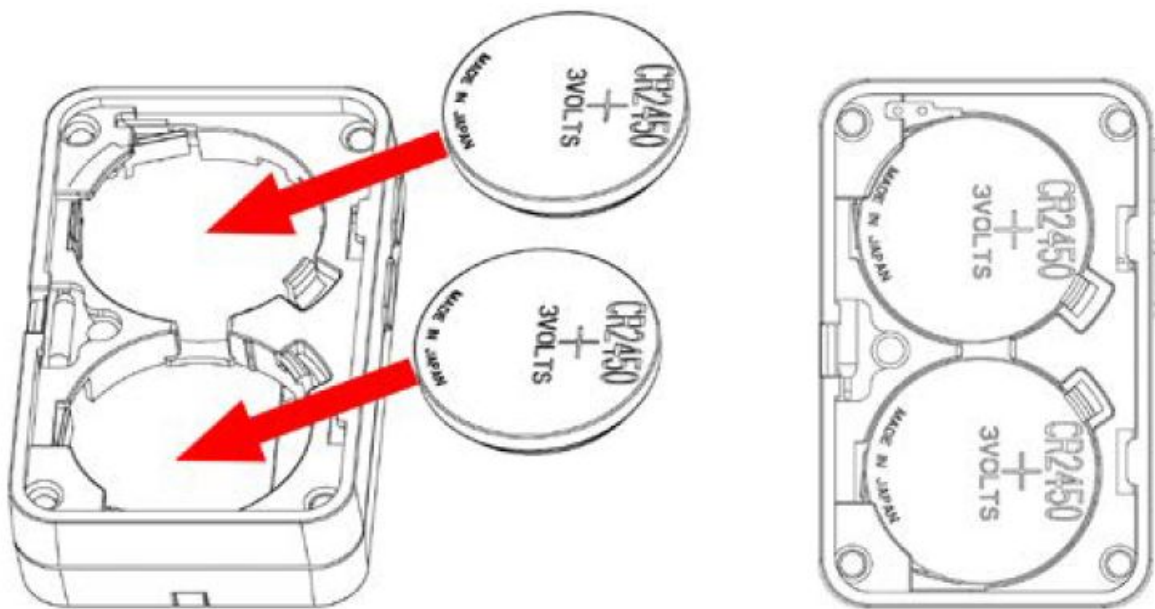

4. When installing the device, the magnet must move along the X axis relative to the sensor.

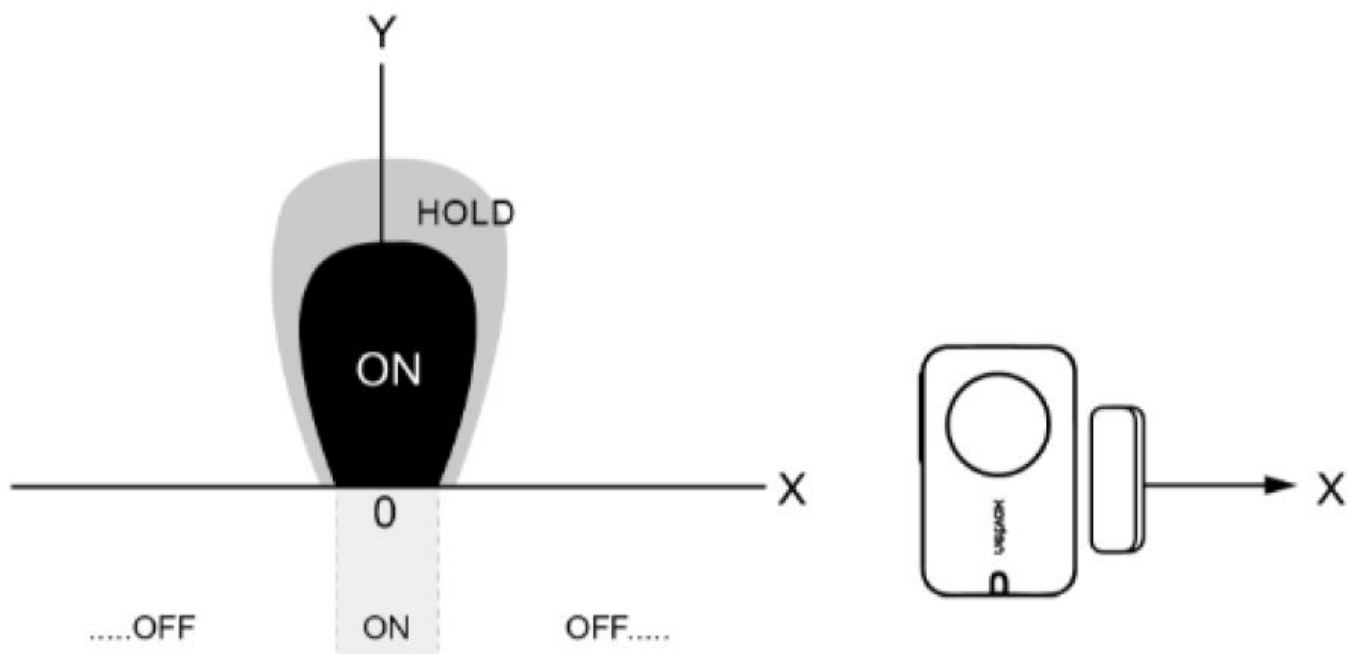

If the magnet moves along the Y axis relative to the sensor, it will cause repeated reports due to the magnetic field.

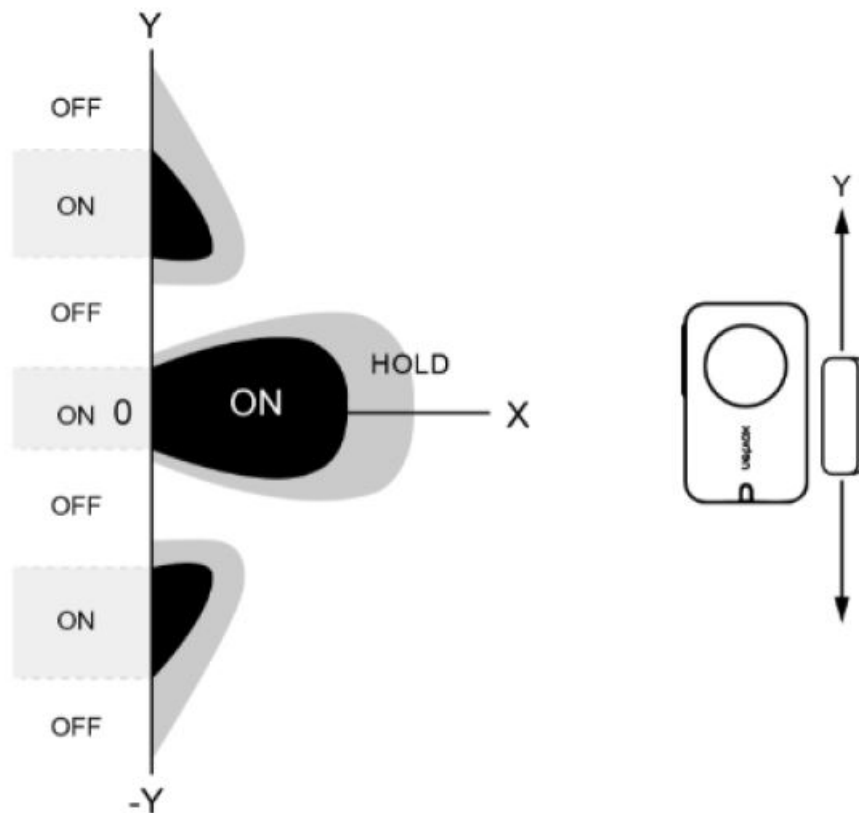

1. Tear off 3M release paper of the magnet body and attach the body to the door frame and stick it to the door in parallel with the door magnet body. (please do not stick it on the rough door to avoid falling off after using the device for a long time).



As shown in the enlarged view on the right

Note:

- Wipe the door clean before installation to avoid dust on the door and affect the adhesion of the device.
 - Do not install the device in a metal shielded box or other electrical equipment around it to avoid affecting the wireless transmission of the device.
 - The installation distance between the magnet body and the magnet should be less than 2cm.
2. When the door is opened, the magnetic body of the door is separated from the magnet, and the magnetic device sends an “alarm” message.

When the door is closed, the magnetic body of the door is merged with the magnet, the device returns to the “normal” state, and the status information of the off is sent.

This figure shows the scene where the door magnetic sensor (R313A) is applied to the door (opening and closing).

It can also be applied to the following scenarios:

- Door, window
- drawer
- Machine room door
- Archive room
- Closet
- Refrigerator and freezer
- Cargo ship door
- Garage Door

Places which are necessary to detect the opening and closing state



Important Maintenance Instruction

Kindly pay attention to the following in order to achieve the best maintenance of the product:

- Keep the device dry. Rain, moisture, or any liquid, might contain minerals and thus corrode electronic circuits. If the device gets wet, please dry it completely.
- Do not use or store the device in dusty or dirty environment. It might damage its detachable parts and electronic components.
- Do not store the device under excessive heat condition. High temperature can shorten the life of electronic devices, destroy batteries, and deform or melt some plastic parts.
- Do not store the device in places that are too cold. Otherwise, when the temperature rises to normal temperature, moisture will form inside, which will destroy the board.
- Do not throw, knock or shake the device. Rough handling of equipment can destroy internal circuit boards and delicate structures.
- Do not clean the device with strong chemicals, detergents or strong detergents.
- Do not apply the device with paint. Smudges might block in the device and affect the operation.
- Do not throw the battery into the fire, or the battery will explode. Damaged batteries may also explode.

All of the above applies to your device, battery and accessories. If any device is not working properly, please take it to the nearest authorized service facility for repair.

Documents / Resources

	netvox R313A Wireless Door/Window Sensor [pdf] User Manual R313A, Wireless Door Window Sensor
---	--