

niko 154-61105 Finishing Set for Single Switch or Push Button Instructions


[Home](#) » [niko](#) » niko 154-61105 Finishing Set for Single Switch or Push Button Instructions 

Contents

- [1 niko 154-61105 Finishing Set for Single Switch or Push Button](#)
- [2 Technical data](#)
- [3 Documents / Resources](#)
 - [3.1 References](#)
- [4 Related Posts](#)

niko

niko 154-61105 Finishing Set for Single Switch or Push Button

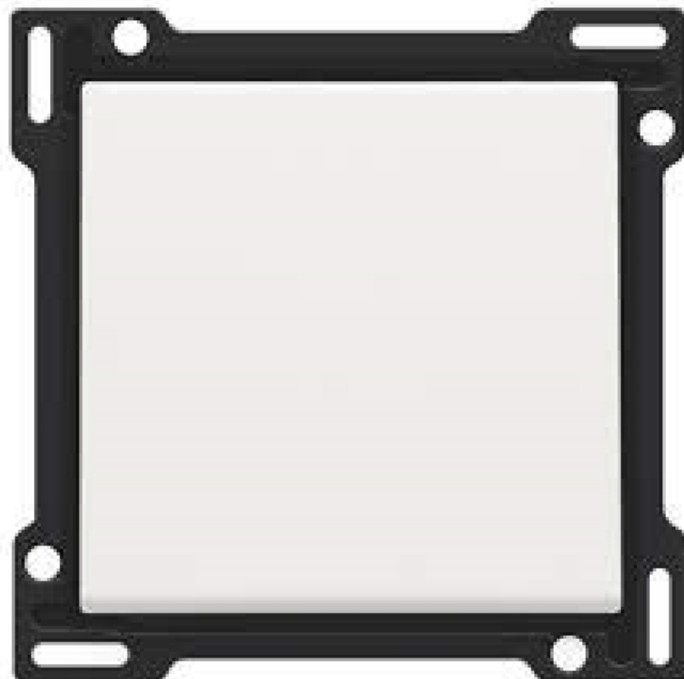

This key is used in the installation of a single-pole, double-pole, two-way or intermediate switch or for a push button. You can control 1 light point with this key.

- Finishing color: white coated.


Technical data

Finishing set for a single switch or push button, white coated. This central plate is surrounded by a flat edge that is equipped at all 4 corners with a rectangular opening, each containing a multi-positional snap hook. The construction of the central plate ensures that the faceplate can always be attached flat to the wall, even in cases of untidy plasterwork. This works in two directions: If the flush-mounting box sticks out of the plasterwork, the multi-positional snap hooks can compensate for a 1 to 1.2 mm margin; if the flush-mounting box is sunk too deeply in the plasterwork, the snap hooks can compensate for up to a 1.8 mm margin. The flat edge around the central plate also has 4 round openings that ensure the correct positioning of the faceplate in relation to the central plate. After mounting all components (faceplate, finishing set, and switch), no metal parts are visible thanks to the flat edge of the central plate.

- Function: The key and the intermediate plate (board) form one unit.
- Number of control buttons: 1 control button
- Material central plate: The central plate is enameled and made of rigid PC and ASA.
- Dismantling: For dismantling the central plate, the flat edge is equipped with two notches indicated by a screwdriver symbol. The central plate can easily be dismantled using a slotted screwdriver.
- Impact resistance: The combination of a mechanism, a central plate and a faceplate has an impact resistance of IK06
- Fire safety
 - The plastic parts of the central plate are self-extinguishing (comply with a filament test of 650°C)
 - The plastic parts of the central plate are halogen-free.
- Dimensions of finishing with flat edge: 56 x 56 mm (HxW)
- Dimensions of the visible area of finishing: 45 x 45 mm (HxW)
- Dimensions (HxWxD): 55.8 x 55.8 x 10.5 mm
- Certification marks: CEBEC, ÖVE, KEMA, VDE, NF, SEMKO

- Marking: CE

Documents / Resources

	<p>niko 154-61105 Finishing Set for Single Switch or Push Button [pdf] Instructions 154-61105 Finishing Set for Single Switch or Push Button, 154-61105, Finishing Set for Single Switch or Push Button</p>
---	---

References

- [n Niko - home automation, switches, socket outlets and detector](#)