

## **ORACLE F-250 Side Mirrors Installation Guide**

Home » Oracle » ORACLE F-250 Side Mirrors Installation Guide 🖫





## **Contents**


1 F-250 Side Mirrors 2 Documents / Resources

## F-250 Side Mirrors


STEP: 1
WATCH THE VIDEO SCAN QR OR VISIT:
WWW.VIMEO.COM/819902580



https://vimeo.com/819902580/ddcff8100f

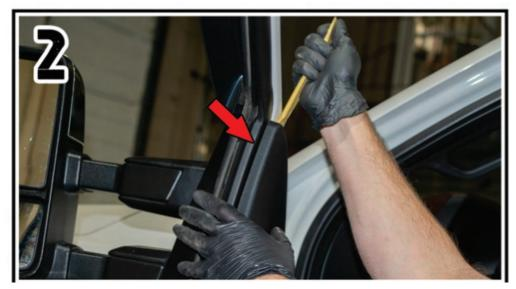

ON THE INSIDE OF THE DOOR, USE A PANEL TOOL TO REMOVE THIS TRIM PIECE.

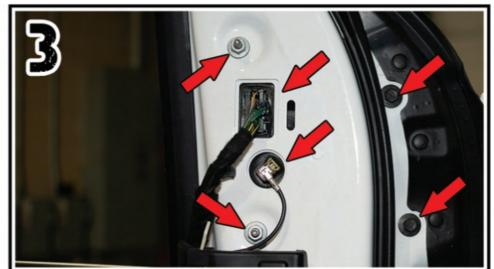

NEXT, DISCONNECT THESE TWD PLUGS AND LOOSEN THE TWO 10MM NUTS AND 10MM BOLTS.




USING A PANEL TOOL, DEPRESS THIS CLIP TO FULLY REMOVE THE MIRROR.




USING A PANEL TOOL, REMOVE THE LOWER MIRROR GLASS BY DEPRESSING THE CLIPS.



DISCONNECT THESE TWO MIRROR HEATER PLUGS FROM THE MIRROR GLASS

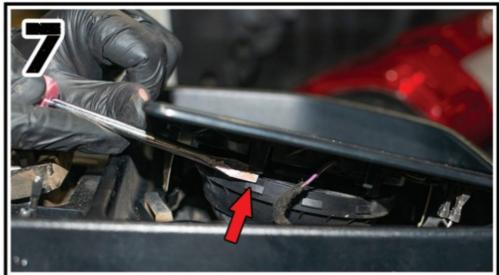

USING A FLAT HEAD SCREWDRIVER, DEPRESS THESE CLIPS TO DISCONNECT THE UPPER MIRROR GLASS.

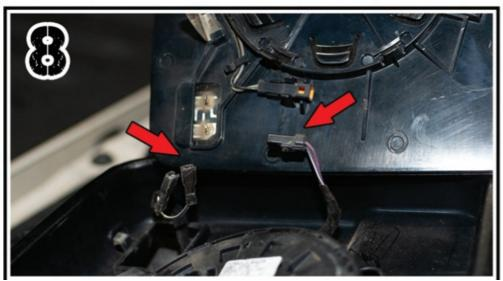


DISCONNECT THE HEATER PLUGS AND BLIND SPOT INDICATOR PLUG FROM THE MIRROR GLASS.



REMOVE THE (5) 7MM SCREWS.



DEPRESS THIS TAB TO REMOVE THE PUDDLE LIGHT. DISCONNECT THE PUDDLE LIGHT.

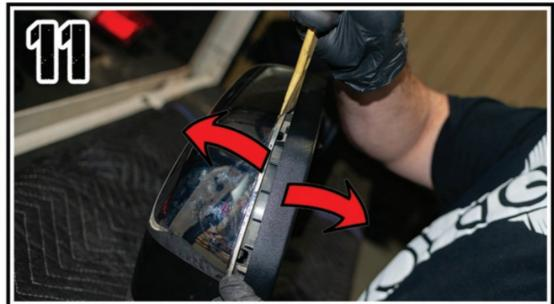

USING A PANEL TOOL, PRY THE MIRROR CAP FROM THE MIRROR HOUSING.



USING A FLAT HEAD SCREWDRIVER.DEPRESS THIS CLIP. MIRROR CAP CAN NOW BE REMOVED.




INSTALL THE NEW ORACLE LED MIRROR CAP IN THE PLACE OF OEM MIRROR CAP.



THE POWER PLUG THAT IS CONNECTING TO THIS TURN SIGNAL HOUSING WILL BE USED TO TAP IN OUR WIRES.



T-TAP THE GROUND [-) WIRE TO THE PINK WIRE. T-TAP THE POWER [+] WIRE TO THE RED WIRE.

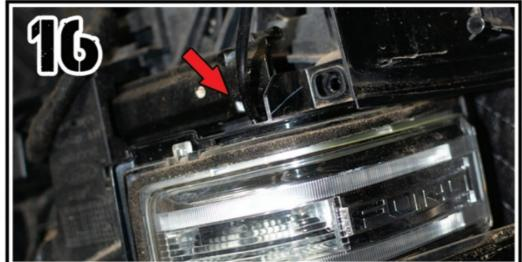

THE CABLE FOR THE MIRROR CAPS WILL RUN BEHIND THE TURN SIGNAL HOUSING. NOW REASSEMBLE MIRROR IN REVERSE ORDER.



© 2023 ORACLE LIGHTING 4401 Division St. Metairie, LA 70002 FOR ADDITIONAL TECHNICAL SUPPORT PLEASE CALL US 1(800)407-5776

## **Documents / Resources**



ORACLE F-250 Side Mirrors [pdf] Installation Guide F-250 Side Mirrors, F-250, Side Mirrors, Mirrors

Manuals+,