




## RBH ACCESS RBH-BFR-FACE Fingerprint Reader Series Instruction Manual

[Home](#) » [RBH ACCESS](#) » RBH ACCESS RBH-BFR-FACE Fingerprint Reader Series Instruction Manual 

### RBH-BFR-FACE INSTALLATION HW 1.0

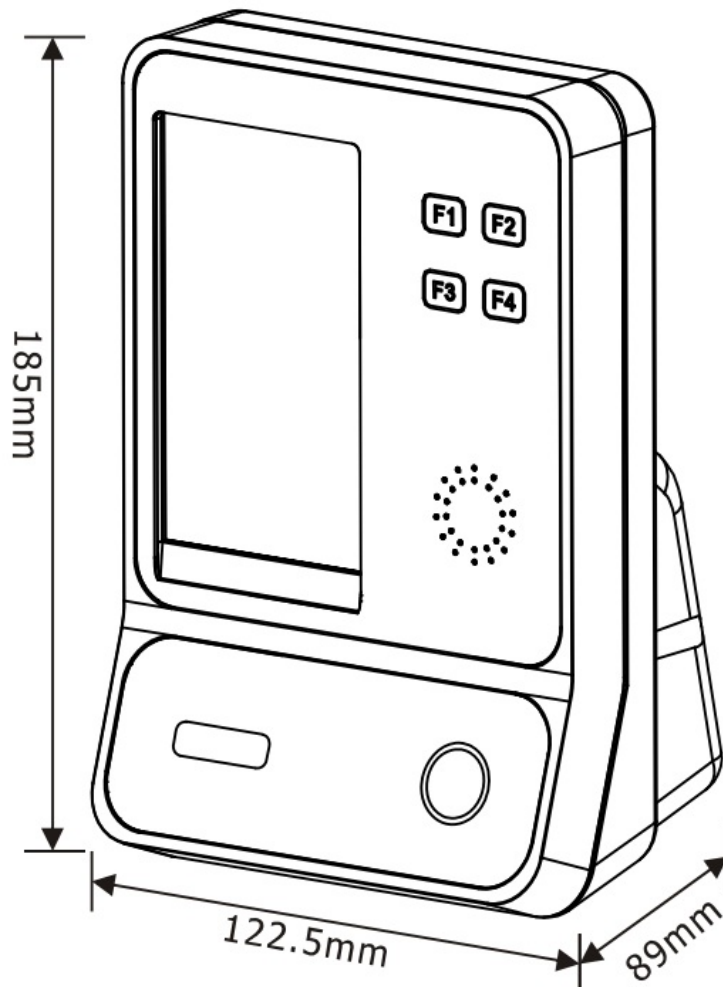


## Contents

- 1 Package content
- 2 Wall-hanger size Specifications
- 3 Installation instructionsApplication structure
- 4 Terminal Front Description
- 5 Installation
- 6 installation environment
- 7 Terminal Back Explanation
- 8 Cable description
- 9 Documents / Resources
- 10 Related Posts

## Package content

- Controller x 1, wall hanger x 1, user manual x 1, screwdriver x 1, kit pack x 1 Kit pack : screw x 4, screw anchors x 4, diode (1N4004) x 1 4 pin cable x 1, 8 pin cable x 1, 9 pin cable x 1

## Wall-hanger size

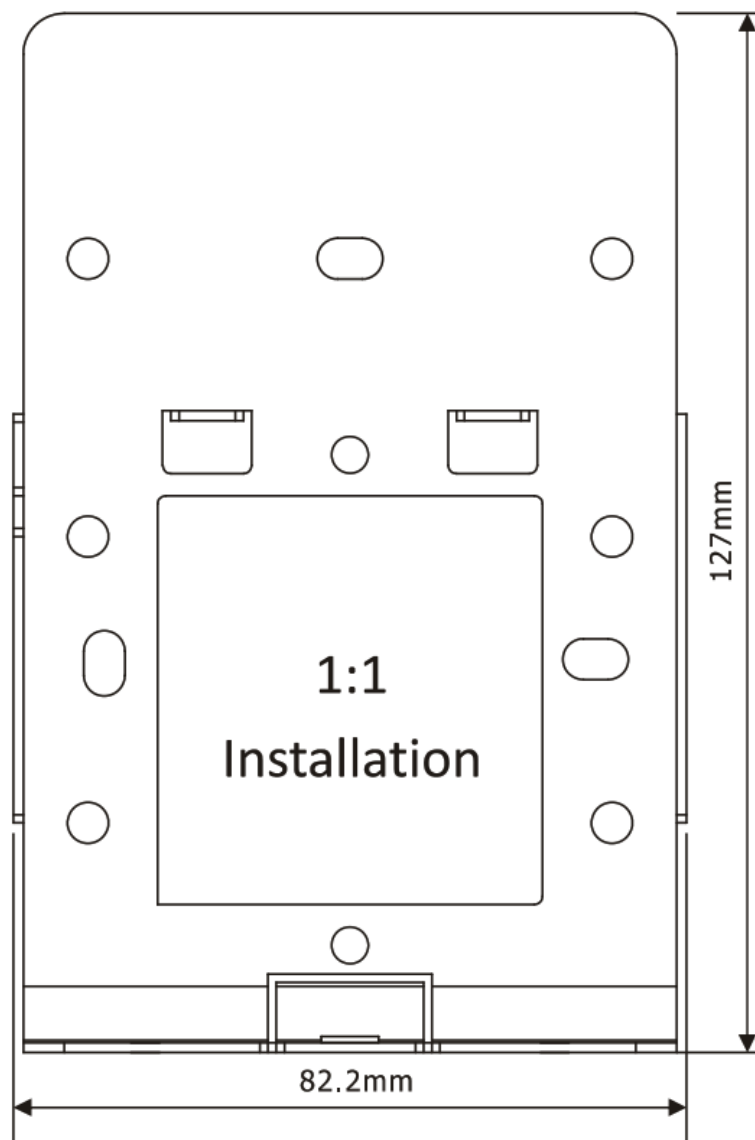


## Specifications



- Dimension : 122.5 x 185 x 89(mm)

- Power : 9-24 VDC/ 1A
- Wiegand communication : Max to 100 meters
- RS485 communication : Max to 1000 meters
- Face recognition distance : 50 " 100 cm
- Install Wall: recommend installation height 115-125 cm

## Installation instructions

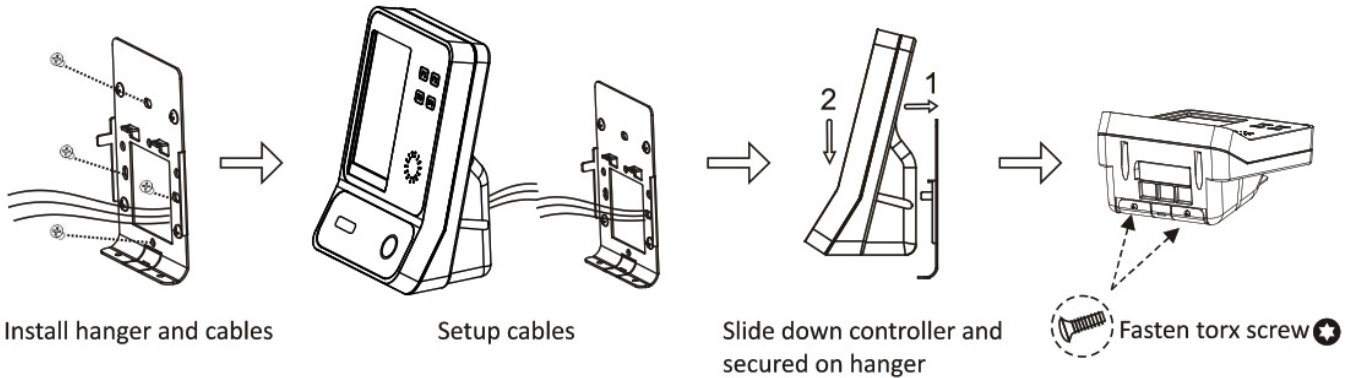


## Application structure

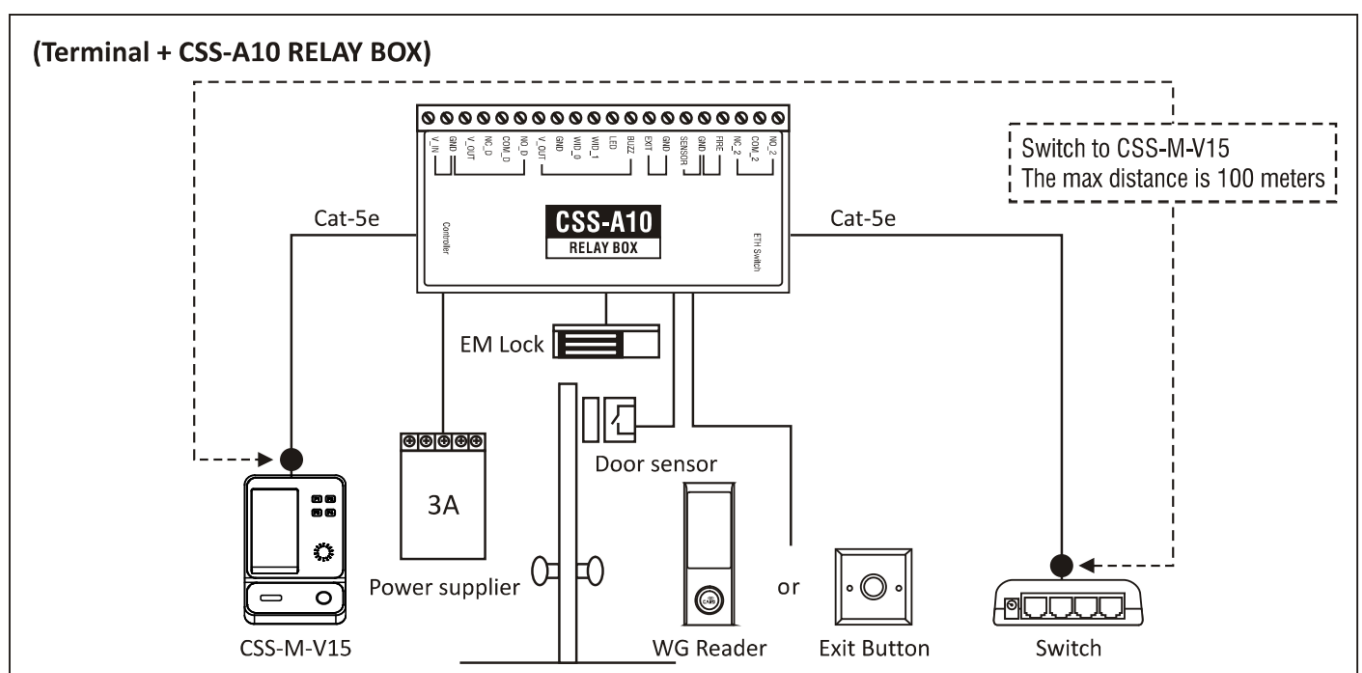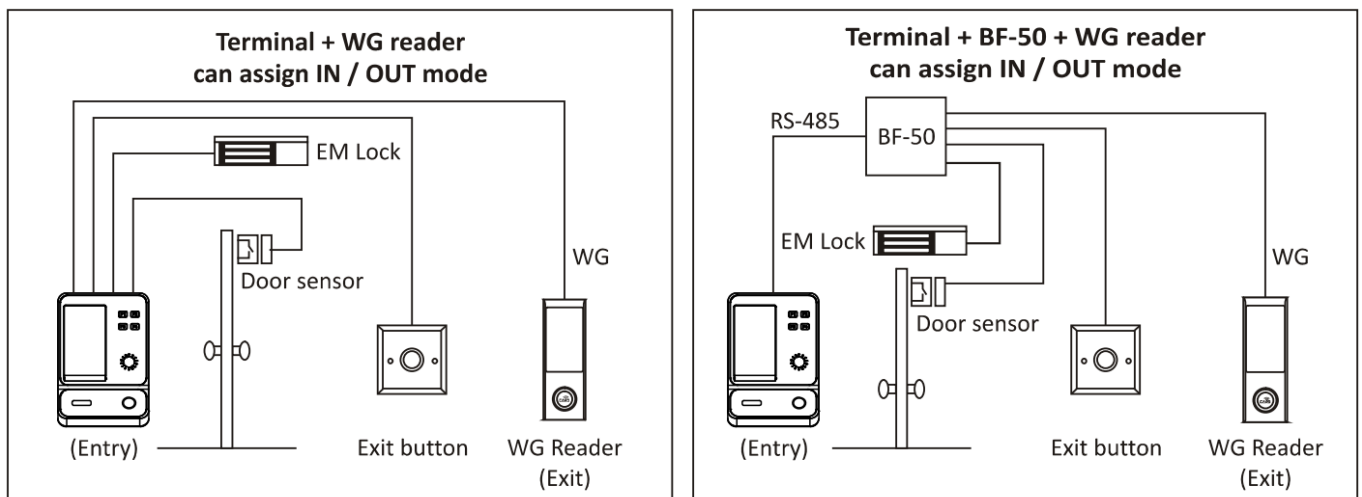


### (Terminal + CSS-A11 RELAY BOX)


★ Support POE power supply, only support single machine, door lock needs additional power supply ★

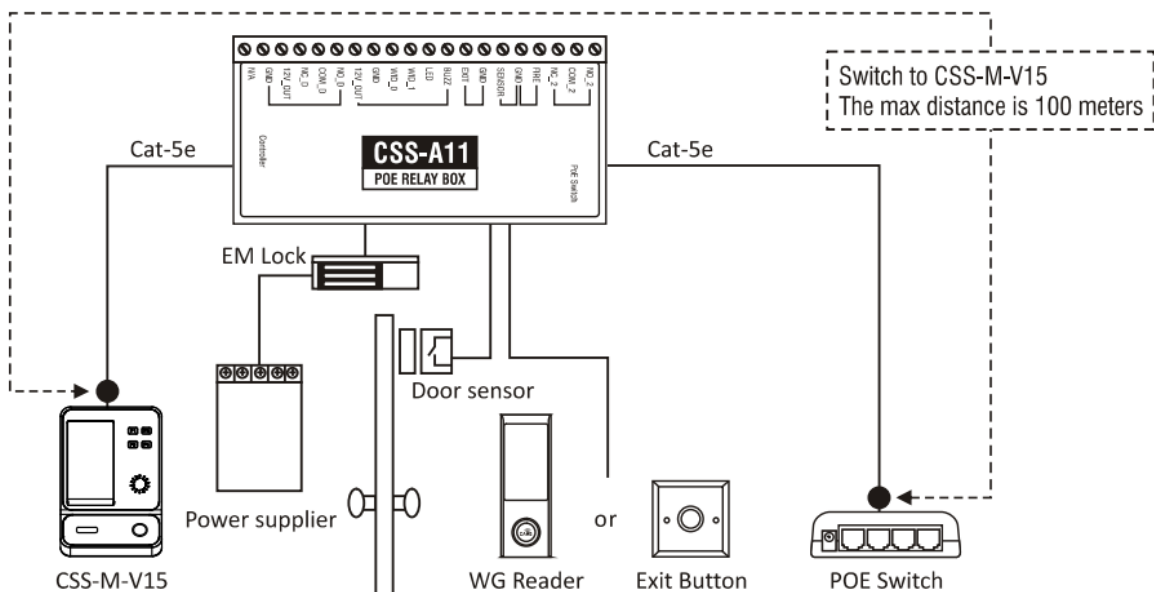

### Terminal Front Description

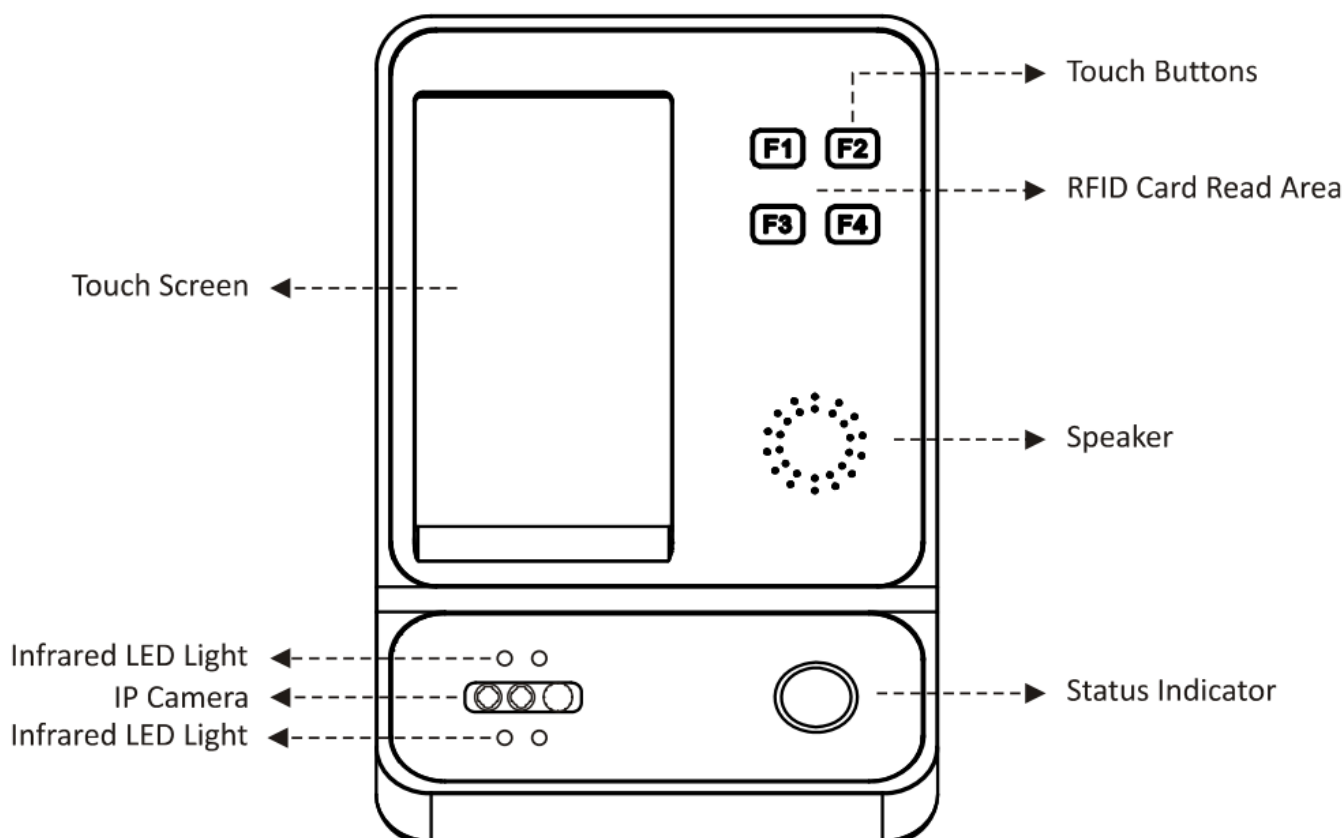


### Installation

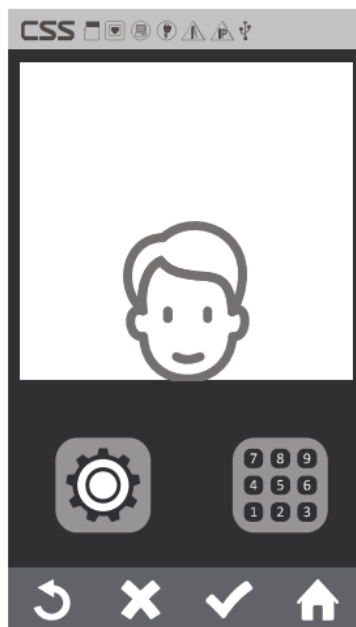


Recommended installation height	
Installed height CM (Bottom of the machine)	Identify users Height CM
115	153~190
117	155~195
119	157~200
121	159~205
123	161~210
125	163~215

The installation height is mainly for a shorter person The face is aligned to the lower edge of the display frame

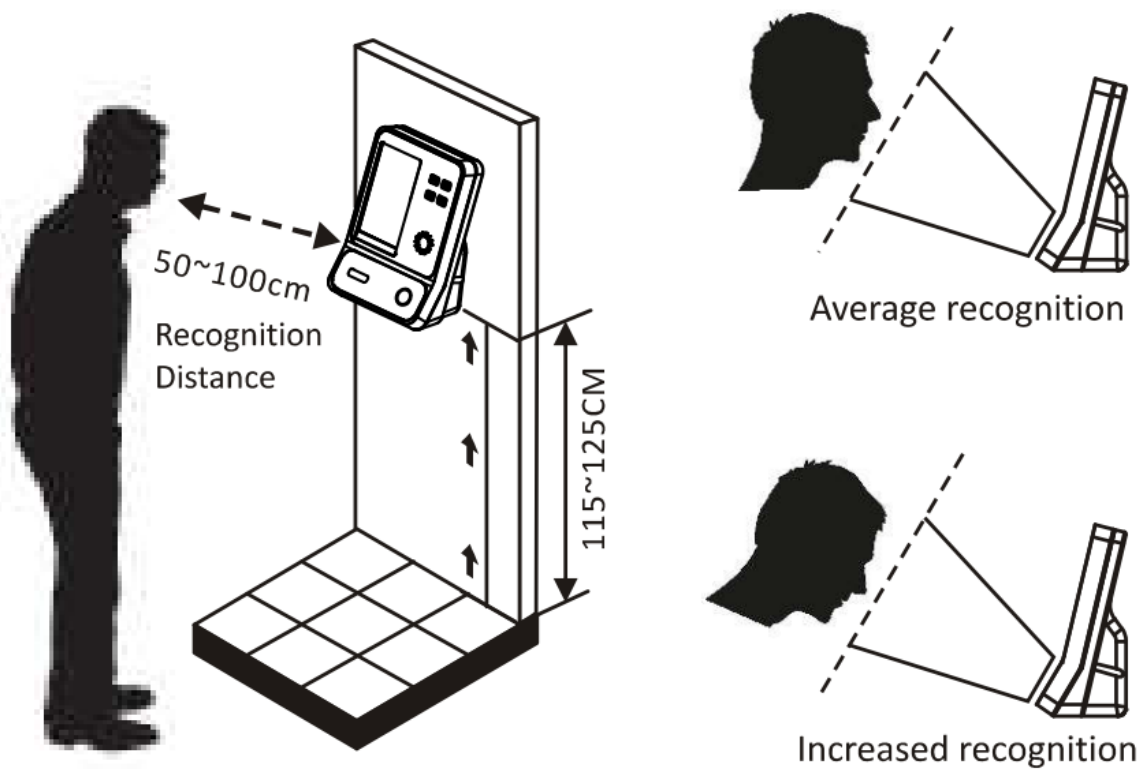

The installation height is mainly for shorter person Recognition distance is about 50~100cm Recommended installation height from the bottom of the machine to the ground is about 115-125cm Please bow your head slightly when recognizing to improve the recognition success rate


### installation environment

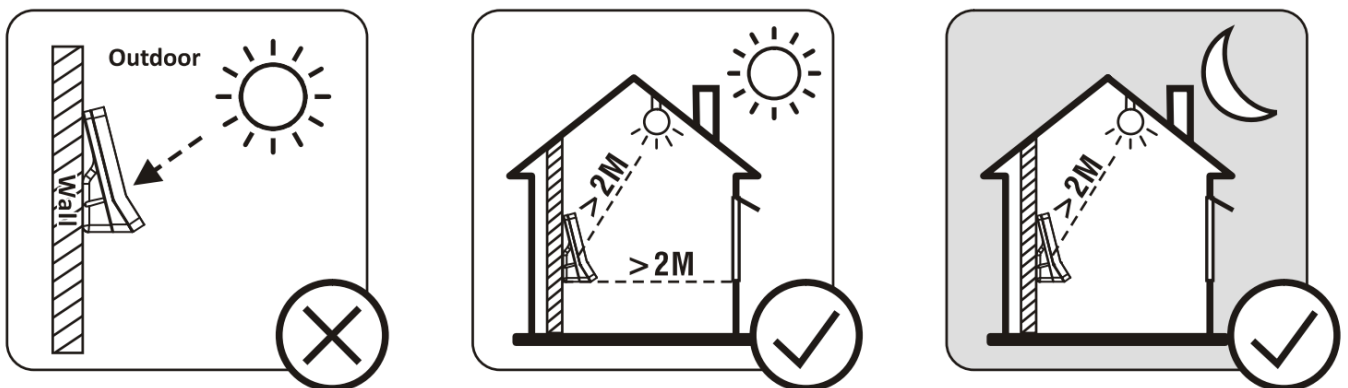


When installing outdoors, direct sunlight equipment, oblique sunlight equipment, or direct sunlight equipment through windows are prohibited When installing indoors, make sure that the place must be installed away from windows/doors / lamp more than 2 meters away equipment

### Terminal Back Explanation

## I. Terminal Back Explanation

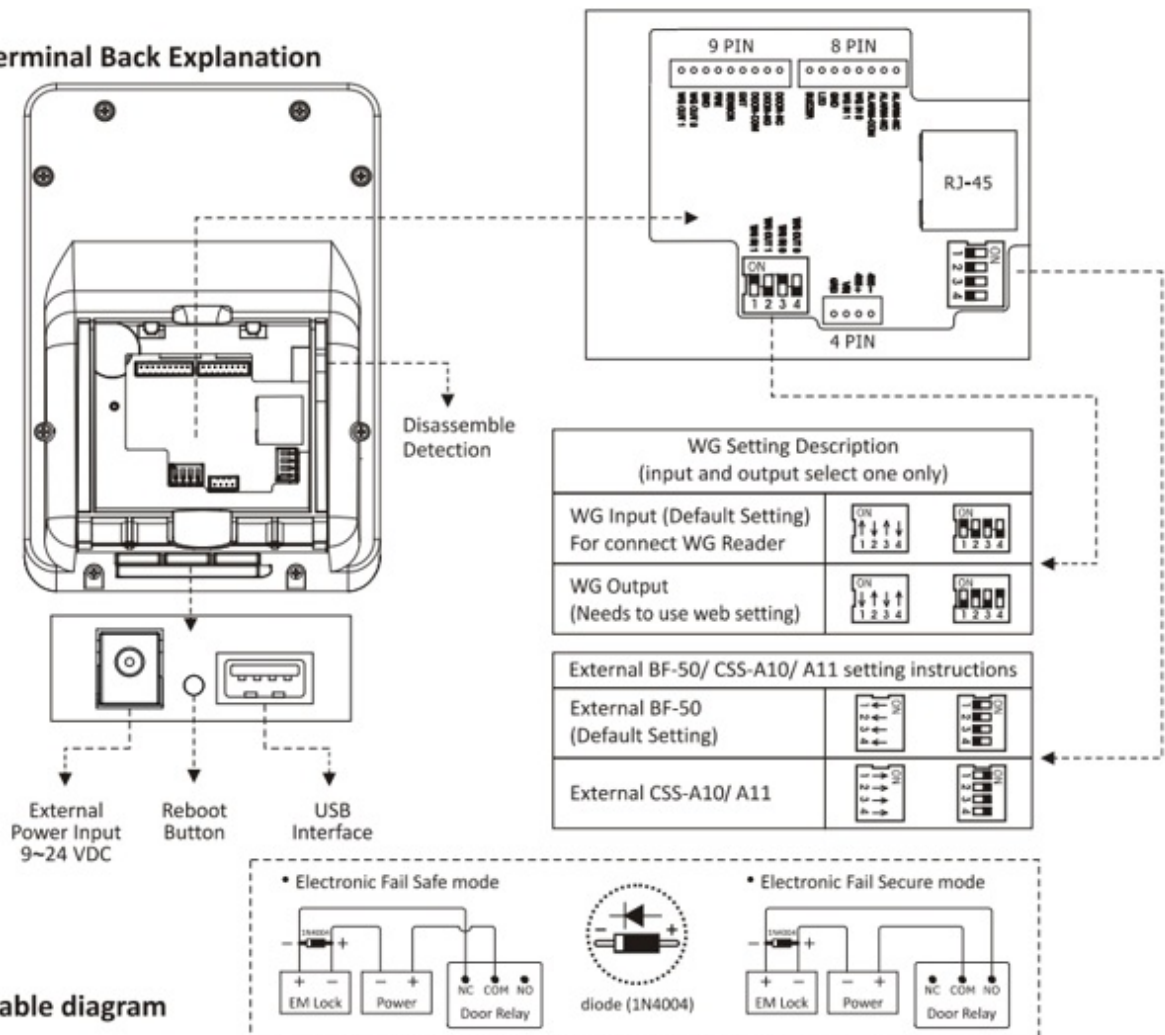

## J. Cable diagram

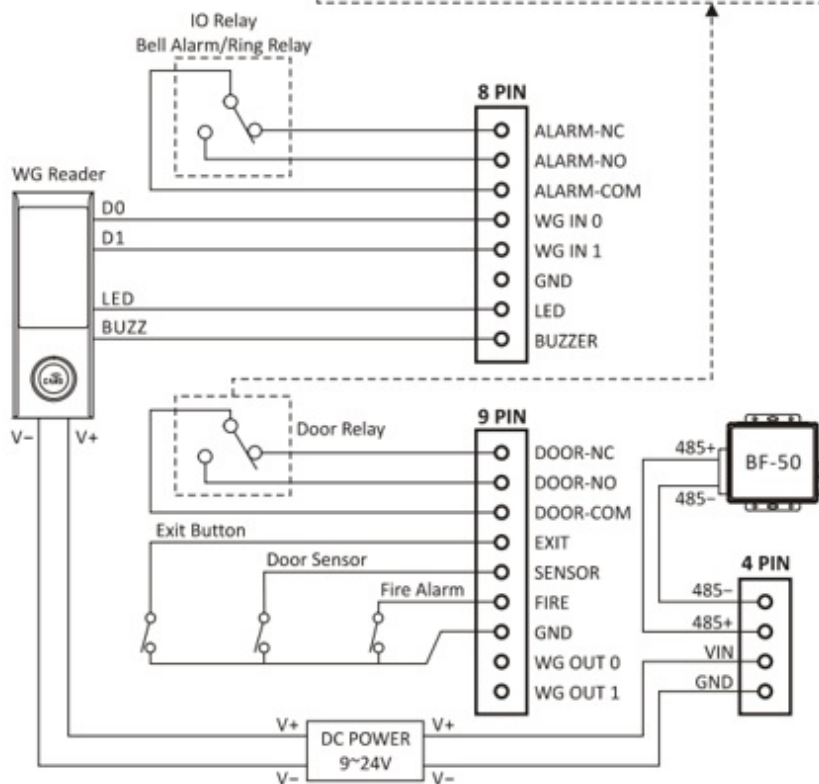

## Cable description

4 PIN

485—	GRAY	For Relay Box BF-50
485+	BROWN	
VIN	RED	DC 9~24V (1A)
GND	BLACK	

## 8 PIN

ALARM-NC	YELLOW BLACK	10 Relay Bell Alarm/ Ring Relay
ALARM-NO	WHITE BLACK	
ALARM-COM	GREEN BLACK	
WG IN 0	RED WHITE	WG Input Connect WG Reader
WG IN 1	BLACK WHITE	
GND	BLACK	GND
LED	ORANGE	Control WG Reader LED/ Buzzer Action
BUZZER	PINK BLACK	

## 9 PIN



DOOR-NC	YELLOW	Door Relay
DOOR-NO	WHITE	
DOOR-COM	GREEN	
EXIT	VIOLET	Exit Button
SENSOR	BLUE	Door Sensor
FIRE	PINK	Fire Alarm
GND	BLACK	GND
WG OUT 0	GRAY BLUE	WG Output
WG OUT 1	ORANGE BLACK	

### FCC Warning


This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Radiation Exposure Statement** This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

## Documents / Resources

	<p><a href="#">RBH ACCESS RBH-BFR-FACE Fingerprint Reader Series</a> [pdf] Instruction Manual RBH-BFR-FACE, RBHBFRFACE, VBP-RBH-BFR-FACE, VBPRBHBFRFACE, RBH-BFR-FACE, Fingerprint Reader Series, RBH-BFR-FACE Fingerprint Reader Series</p>
---	--