




REMARK RK-C2063T-04 Elite Spec Installation Guide

[Home](#) » [REMARK](#) » [REMARK RK-C2063T-04 Elite Spec Installation Guide](#) 



**RK-C2063T-04 Elite Spec
Installation Guide**

Contents

1

PRODUCT
INFORMATION

2

Documents / Resources


2.1

References

PRODUCT INFORMATION

MANUFACTURER:	SCION / SUBARU / TOYOTA
YEAR:	2013+
MODEL:	FR-S / BRZ / GT86 / GR86
TRIM:	—
CHASSIS CODE:	ZN6 / ZN8 / ZD8 / ZN8
REMARK PART #:	RK-C2063T-04 : ELITE SPEC. CATBACK, STAINLESS STEEL TIP COVER RK-C2063T-04T : ELITE SPEC. CATBACK, BURNT STAINLESS STEEL TIP COVER

No.	Description	Part Num.	Qty	Torque
1	2.5" Composite 2-Bolt Gasket	65C2-105	1	
2	2.5" Composite 2-Bolt Gasket	65C2-01	1	
3	M10 Serrated Hex Head Bolt L=35mm	M10B35	6	—42 ft-lbs.
4	M10 Serrated Nut	MI ON	6	—42 ft-lbs.
5	M5 Button Head Bolts	M5B8	6	— 55 INCH-LBS.
A	Stainless Steel Midpipe Section	N/A	1	
B	Passenger Side Muffler Canister with Y-Pipe	N/A	1	
C	Driver Side Muffler Canister	N/A	1	
D	Polished SS or Burnt SS Tip Cover (-4.25"OD)	N/A	2	

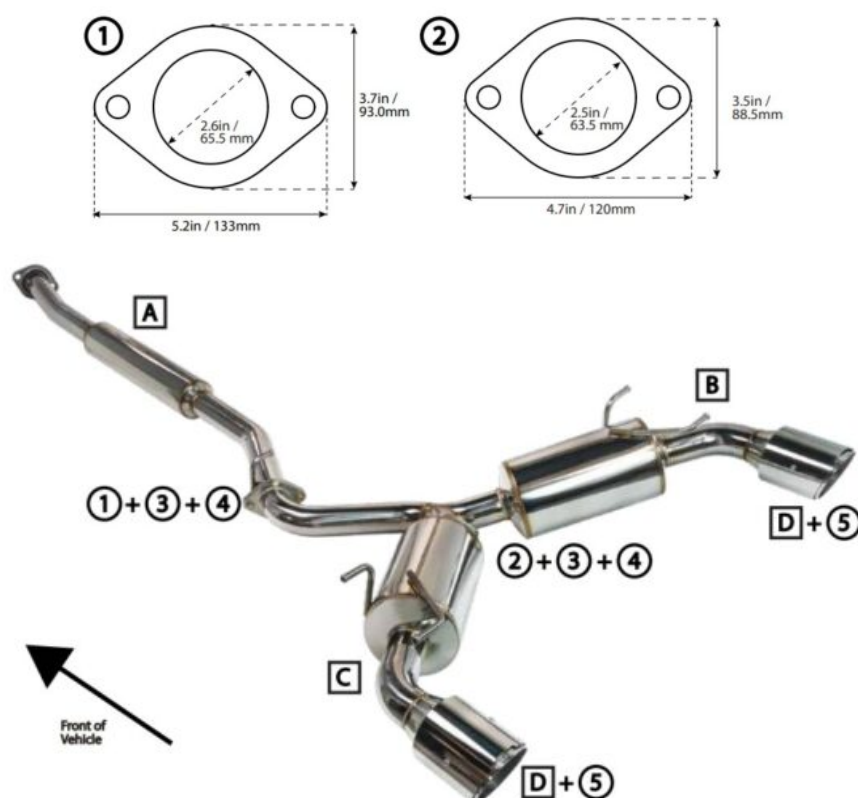

1. We recommend installation to be performed by a trained and/ or qualied technician.
2. Remove OE exhaust system: rear muer and midpipe
3. Ensure the six (6) M5 button head bolts securing the tip covers are tight. Handtight or 55 INCH-LBS.
4. Install REMARK exhaust components using the original rubber hangers unless otherwise noted
5. You can install this system as an assembled unit or section by section. If installing section by section, we recommend starting from the front and working rearwards
6. Install all gaskets and hardware. Leave the hardware hand tight. For the midpipe to intermediate pipe connection:
 - A. if using OEM intermediate pipe, retain OEM gasket and re-use OEM hardware.
Torque to OEM spec.
 - B. if using an aftermarket intermediate pipe with a flat 2-bolt flange, use gasket provided with the intermediate

pipe



7. Align flanges, gasket, and snug all hardware so that sections cannot move.
8. Check positioning of the exhaust piping, and tips(s). Reposition if needed by loosening hardware, adjust position and retighten hardware.
9. When placement is confirmed, tighten all hardware to recommended torque spec.
10. Gently shake/ move the exhaust system to ensure there is proper clearance around the entire system, especially the tip to bumper.
11. Thoroughly wipe down the exhaust system from any grease, dirt, handprints, fingerprints, etc... as these may cause a permanent stain once the exhaust reaches operating temp.
NOTE: If optioned with the Burnt finish tips, make sure to only clean with car wash soap and water. Some cleaners may affect the Burnt finish.
12. Start the engine
13. Check for any leaks, fitment issues, rubbing, etc..
14. After ~100 miles of driving, re-check for exhaust leaks, fitment issues, and re-torque all hardware.



- 1-year limited manufacturer defect warranty from date of purchase All warranty claims are subject to inspection by REMARK at our facility
- Limited Warranty only applies to the original purchaser of the product
- REMARK is not responsible for fitment issues on non-US spec vehicles as all products are developed on US spec models
- Product finishes are not covered under warranty and considered wear & tear
- No warranty whatsoever will be valid if the defect was caused by abuse, negligence and/or mishandling. That includes weather conditions, natural disasters, any road/off-road conditions, and any accidents/collision you were part of. Acidic cleaning products or steel wool are not to be used unless by a trained professional. Some chemical cleaning products may damage the product and/or finishes.
and tear (the damage that happens to our product in ordinary use) is not covered by our limited warranty.
- Wear Improper installation or misuse of the product may lead to failure and damage to both product and vehicle. The user assumes all responsibility.
- All products are intended for use off-public streets and highways. Vehicle manufacturer warranty may be voided should any modification(s) or removal(s) of OEM(factory) components are determined.
- Federal and state law may prohibit the removal, modification or rendering of any device affecting vehicle emissions or state regulated decibel limits. It is the customer's responsibility to be aware of federal, state and local laws. User assumes all cost and risks associated with purchase and installation of aftermarket components. REMARK is not responsible for any fees, fines, or any type of penalties you have received from any authority. Buyers are responsible for all return shipping fees unless otherwise noted
- REMARK does not cover any installation, un-installation, labor fees, or related



REMARK, INC. 16782 HALE AVE, STE A,
IRVINE CA 92606 SALES@REMARK-USA.COM 949.366.7661

Documents / Resources

	<p>REMARK RK-C2063T-04 Elite Spec [pdf] Installation Guide RK-C2063T-04, RK-C2063T-04T, RK-C2063T-04 Elite Spec, RK-C2063T-04, Elite Spec, Spec</p>
--	--

References

- [!\[\]\(3da2b303d29c1ea489bbe26a3f5ac664_img.jpg\) USA Location information - USA.com](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.