



## TIMEGUARD BoostMaster TGBT4 2 Hour Electronic Boost Timer Instruction Manual

[Home](#) » [TIMEGUARD](#) » TIMEGUARD BoostMaster TGBT4 2 Hour Electronic Boost Timer Instruction Manual 

# TIMEGUARD®

## **BoostMaster**

TGBT4 2 Hour Electronic Boost Timer  
Instruction Manual



## Contents

- 1 General Information
- 2 Safety
- 3 Technical Specifications
- 4 Installation
- 5 Connection Diagram
- 6 Operation
- 7 Stopping or Increasing Boost
- 8 3 Year Guarantee
- 9 Documents / Resources
- 9.1 References

## General Information

These instructions should be read carefully and retained for further reference and maintenance.

## Safety


- Before installation or maintenance, ensure the mains supply to the boost timer is switched off and the circuit supply fuses are removed or the circuit breaker turned off.
- It is recommended that a qualified electrician is consulted or used for the installation of this time switch and install in accordance with the current IEE wiring and Building Regulations.
- Check that the total load on the circuit including when this boost timer is fitted does not exceed the rating of the circuit cable, fuse or circuit breaker.

## Technical Specifications

- 230V AC 50 Hz
- Unfused
- Switch Rating;
  - 13A Resistive (3kW)
  - 1000W filament or halogen lighting
  - 500W Fluorescent lighting
  - 100W low energy lighting or LED lighting
- Contact Type: Normally Open
- Minimum Depth of Wall Box: 25mm
- Boost Times: ¼, ½, 1, 2 hours
- Power Status: LED indicator
- Operating Temperature: 0°C to +40°C
- CE Compliant
- Dimensions (H x W x D): 85 x 85mm x 31mm
- Front projection: 15 at sides to 22 at centre.

**Note:** Not suitable for use with Discharge Lighting  
**Also available in the Boost timer range:**

- TGBT5 4 hour boost timer.
- TGBT6 2 hour plug-in boost timer.
- FBT4 2 hour fused spur boost timer.
- FBT5 4 hour fused spur boost timer.

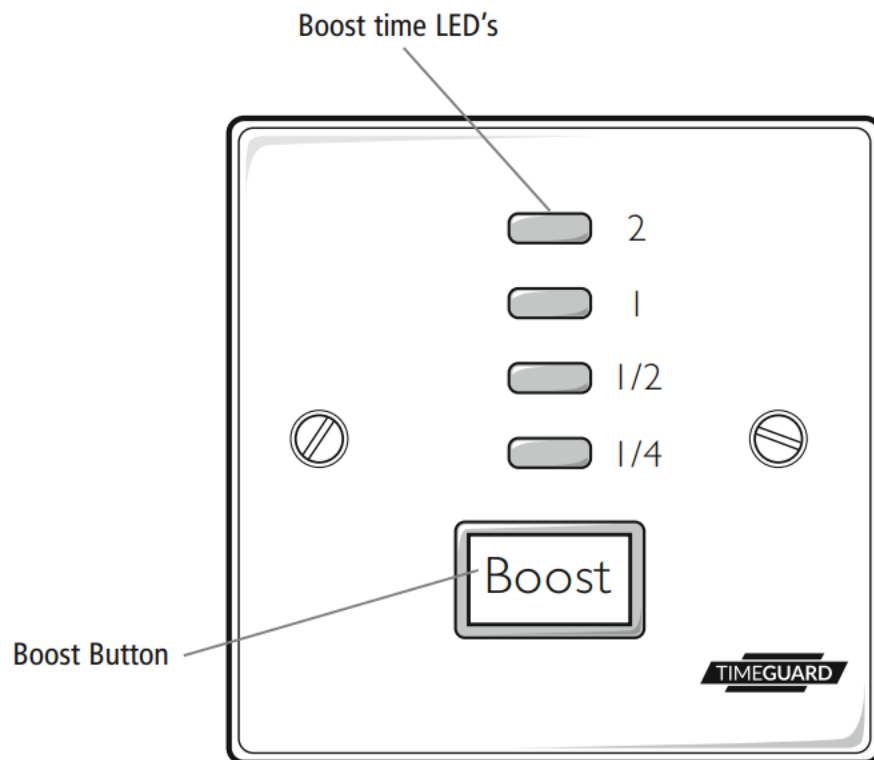


## Installation

- Ensure the mains supply is switched off and the circuit supply fuses are removed or the circuit breaker turned off.
- Connect the incoming 230V 50Hz supply and outgoing load cables to the relevant terminals ensuring correct polarity is observed and that all bare conductors are sleeved (see section 5. Connection Diagram).
- A front cable exit cut-out is provided with a pre-installed removable cover.
- If the front exiting cable cut-out is required:
  1. Undo the 2 fixing screws and remove the blanking plate (you can discard the blanking plate at this stage but keep the 2 fixing screws).
  2. Remove the cable grip from the accessory pack.
  3. Using the 2 fixing screws previously removed from the blanking plate, secure the load cable to the unit.
- Finally secure the unit to the back box with the fixing screws provided, forming the cables during installation to avoid any entrapment and cable damage.

## Connection Diagram

The terminals are marked as follows on the rear of the boost timer;

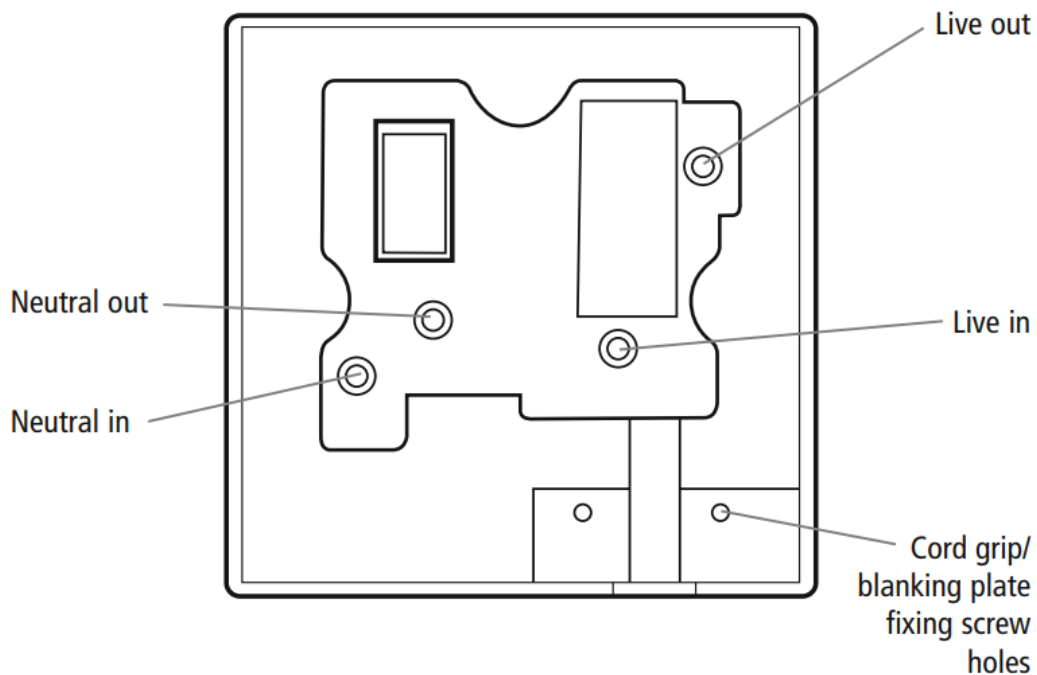

### Mains Supply

Live (Brown or Red) to **L IN**

Neutral (Blue or Black) to **N IN**

### Load

Switch Live (Brown or Red) to **L OUT**

Neutral (Blue or Black) to **N OUT**

### Operation

- The required boost time is selected by pressing the button marked boost, repeatedly. The LEDs adjacent to the time markers will light up in sequence, showing the selected boost period.
- The LED's adjacent to the time markers (above the Boost button) will light up in the sequence;
  - First push gives  $\frac{1}{4}$  hour boost (LED opposite  $\frac{1}{4}$  hour is ON)
  - Second push gives  $\frac{1}{2}$  hour boost (LED opposite  $\frac{1}{2}$  hour is ON)
  - Third push gives 1 hour boost (LED opposite 1 hour is ON)
  - Fourth push gives 2 hour boost (LED opposite 2 hour is ON)
  - Fifth push returns to zero boost (all LEDs are OFF).
- Once the boost selected is underway, the LEDs will go out sequentially, indicating the approximate boost time remaining.
  - The LED which is about to go out will flash when there is less than 2 minutes remaining of that period.
  - Example: 2 hour boost has been set, all LEDs are on;
  - After 58 minutes the 2 hour LED will flash for two minutes, and then go out indicating 1 hour remaining.
  - After a further 28 minutes, the 1 hour LED will flash for two minutes, and then go out indicating  $\frac{1}{2}$  hour remaining.
  - After a further 13 minutes, the  $\frac{1}{2}$  hour LED will flash for two minutes, and then go out indicating 15 minutes remaining.
  - After a further 13 minutes the  $\frac{1}{4}$  hour LED will flash for two minutes, and then go out, indicating that the boost period has finished.
- In this way the user has an approximate guide to the remaining duration of the boost.

## Stopping or Increasing Boost

- During the first 15 seconds of activating the boost timer, it can be stopped by pressing the boost button repeatedly until all the LEDs are off.
- It can also be stopped during this time period, by holding down the boost button until all the LEDs are off.
- After the first 15 seconds of activation, the boost may be cancelled with a single push of the boost button.
- The Boost periods can only be increased during the first 15 seconds of activation. At all other times, the boost must be cancelled first, and the required boost periods re-entered.
- If the boost button is pushed and held down, the LEDs will cycle upwards with 1 second between each change, in sequence ¼, ½, 1, 2, OFF.

## 3 Year Guarantee

In the unlikely event of this product becoming faulty due to defective material or manufacture within 3 years of the date of purchase, please return it to your supplier in the first year with proof of purchase and it will be replaced free of charge. For the second and third years or any difficulty in the first year telephone the helpline on 020 8450 0515.

**Note:** A proof of purchase is required in all cases. For all eligible replacements (where agreed by Timeguard) the customer is responsible for all shipping/postage charges outside of the UK. All shipping costs are to be paid in advance before a replacement is sent out.



If you experience problems, do not immediately return the unit to the store.

Telephone the Timeguard Customer Helpline;

HELPLINE

**020 8450 0515**

or email [helpline@timeguard.com](mailto:helpline@timeguard.com)

Qualified Customer Support Co-Ordinator's will be on-line to assist in resolving your query.



A **theben** Group Company

For a product brochure please contact:

**Timeguard Limited.**

Victory Park, 400 Edgware Road,  
London NW2 6ND

**Sales Office:** 020 8452 1112


or email [csc@timeguard.com](mailto:csc@timeguard.com)

[www.timeguard.com](http://www.timeguard.com)

Zerofour – March 2016

67-058-337(Issue 4)

## Documents / Resources



[TIMEGUARD BoostMaster TGBT4 2 Hour Electronic Boost Timer](#) [pdf] Instruction Manual TGBT4, BoostMaster TGBT4, BoostMaster TGBT4 2 Hour Electronic Boost Timer, 2 Hour Electronic Boost Timer, Electronic Boost Timer, Boost Timer

## References

-  [timeguard.com](http://timeguard.com)

[Manuals+](#), [home](#)

[privacy](#)