



TSC RS-232 Bluetooth Module Installation Guide

[Home](#) » [TSC](#) » TSC RS-232 Bluetooth Module Installation Guide 

TSC RS-232 Bluetooth Module



Contents

1 INDUCTION

2 Installing the Bluetooth Device to the Printer

3 Setting the Communication Settings

4 LED Indication

4.1 FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

4.2 CAUTION:

4.3 RF exposure warning

5 Documents / Resources

6 Related Posts


INDUCTION

Bluetooth wireless technology is a low-power consuming way to communicate between devices. It has a maximum range of 30 feet (10m). The Bluetooth device connects to your printer's serial port and confirms to V2.1+EDR of the Bluetooth specification.

Installing the Bluetooth Device to the Printer

Please follow the steps below to install the Bluetooth device.

1. Turn off the printer power.
2. Plug in the Bluetooth device into the RS-232 port.
3. Fasten the device by two screws

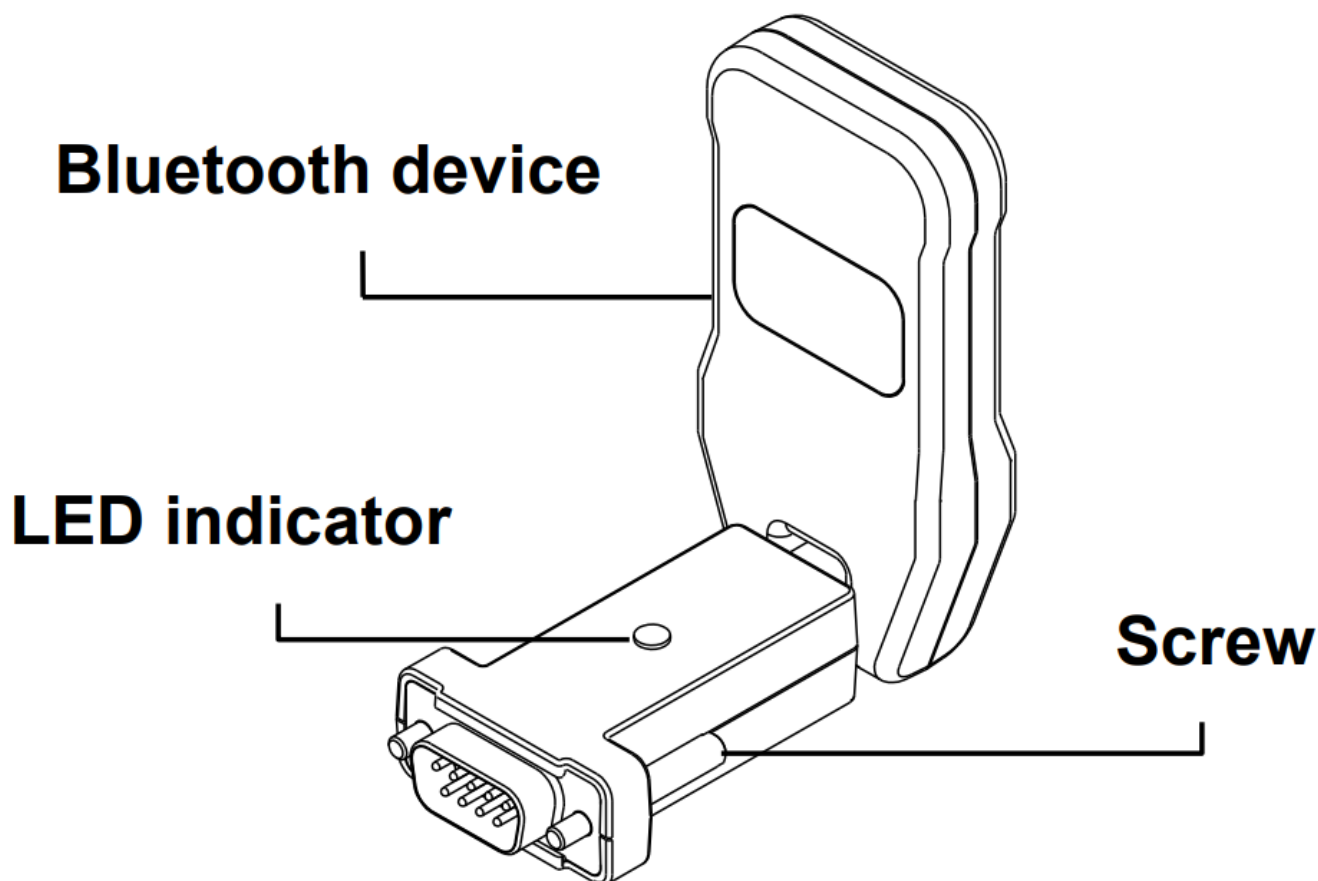


Note:

This RS-232 interface of Bluetooth device is used with the printer only.

Setting the Communication Settings

For industrial printer, the RS-232 communication parameters can be configured from the LCD control panel by the following procedures.

1. Turn on the printer power.
2. Enter the main menu.
3. Select "Serial Comm." option.
4. Make sure the communication parameters are set to **115200 bps baud rate, None parity, 8 data bits, 1 stop bit.**

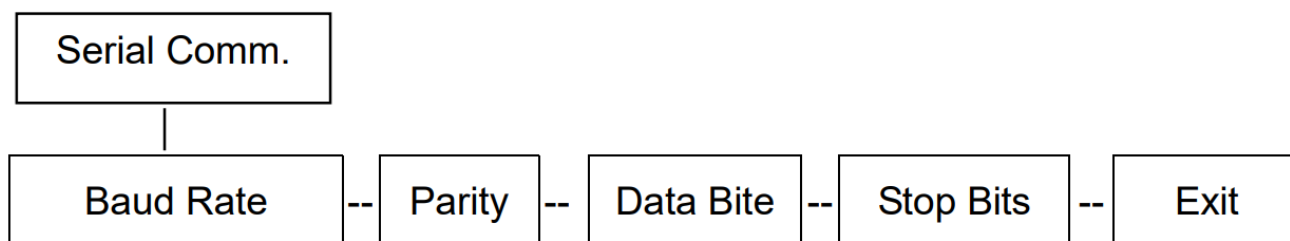

For desktop printer models, the RS-232 communication parameters can be setup by following command or using Diagnostic Tool.

Syntax:

SET COM1 115, N, 8, 1

LED Indication

LED	Status
Green	Power on
Amber	Bluetooth device is connected

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

RF exposure warning

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment must be installed and operated in accordance with provided instructions and must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated

with a minimum distance of 20 centimeters between the radiator and your body.

RSS-Gen(P23):

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada’s licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

RSS-102(P9):

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body

Documents / Resources



TSC RS-232 Bluetooth Module [pdf] Installation Guide

BA21N, VTV-BA21N, VTVBA21N, RS-232 Bluetooth Module, RS-232, Bluetooth Module, Module