



ViewSonic Lumens Projector Owner's Manual

[Home](#) » [Viewsonic](#) » ViewSonic Lumens Projector Owner's Manual

Contents [[hide](#)]

- [1 ViewSonic Lumens Projector](#)
- [2 Key Features](#)
- [3 Product Description](#)
- [4 Specifications:](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)

ViewSonic®

ViewSonic Lumens Projector




Key Features

- 6,200 Lumen Brightness
- Vertical/Horizontal Lens Shift with Centered Lens
- Stackable Design
- 360-degree Installation
- SuperColor: Amazing Color Accuracy

Product Description

Bright and versatile for any professional installation, the ViewSonic® Pro9510L XGA projector delivers everything you need for big screens in big venues. Delivering 6,200 lumens of advanced high brightness, this projector is ideal for auditoriums, large boardrooms, houses of worship, and more. Thanks to SuperColor™ technology, content is brought to life with captivating color, crisp graphics, and stunning videos no matter the environment. Designed for installers, this top-notch performer is also easy to deploy and manage with its wide 1.7x optical zoom adjustment, a centered lens design, and a vertical/horizontal lens shift feature that provides extreme flexibility in even the most challenging installations. Thanks to the stackable design of these projectors, light output can be doubled by simply placing one projector on top of the other – perfect for large venues with high ambient light.

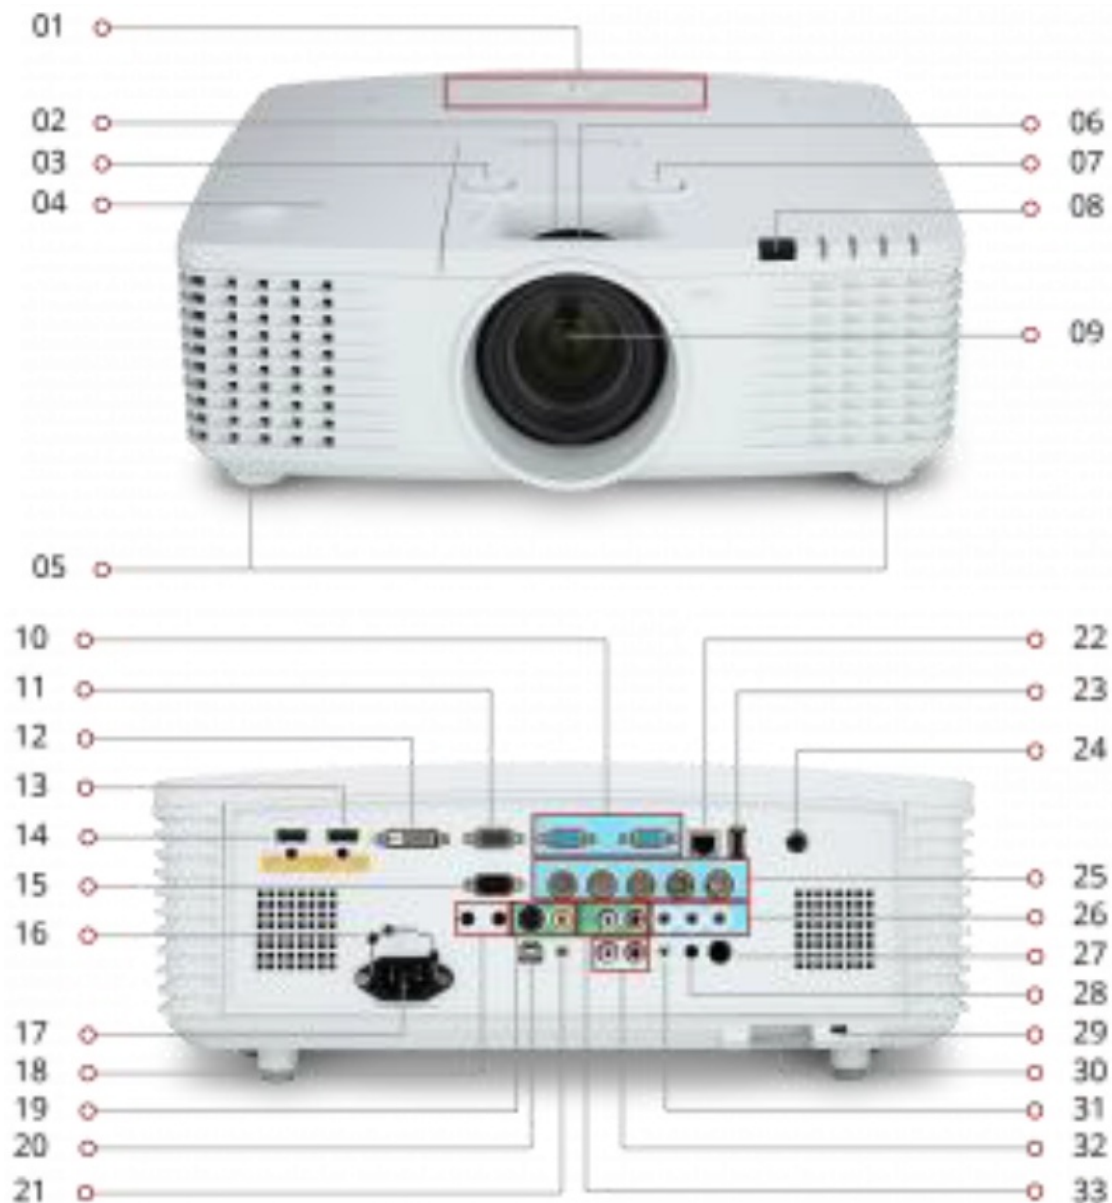

1. Menu Controls
2. Zoom Ring
3. Horizontal Lens Shift

4. Lamp Access
5. Elevation Feet
6. Focus ring
7. Vertical Lens Shift
8. IR Remote Sensor
9. Projection Lens
10. VGA (x2)
11. Monitor Out
12. DVI-D
13. HDMI In
14. HDMI/MHL In
15. RS232
16. Power Cable Lock
17. AC In
18. Video/S-Video In
19. Wired Remote In/Out
20. USB Service Port
21. Mic In
22. LAN
23. USB 2.0 Type A
24. 3D VESA
25. BNC In
26. PC Audio In
27. IR In/Out
28. 12V DC Trigger
29. Kensington Lock Slot
30. Security Bar
31. Audio Out
32. RCA Audio Out
33. RCA Audio In

Specifications:

1024 x 768 Resolution
6,200 ANSI Lumens
1.3 – 2.21:1 Throw Ratio

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type: DLP Lamp
Resolution Type: XGA (1024×768)

Resolution: 1024 x 768
Brightness (Lumens): 6,200 ANSI
Display Size (in.): 30 – 300 in. / 0.76 – 7.62 m
Throw Distance: 2.6 – 44.2 ft / 0.79m-13.47 m
Throw Ratio: 1.3 – 2.21:1
Keystone: Vertical ($\pm 30^\circ$) / Horizontal ($\pm 25^\circ$)
Lens: 1.7x Manual optical zoom / manual optical focus
Light Source (watt): 370
Light Source Life, Normal (hours): 1500
Light Source Life, Dynamic Eco-Mode (hours): 3500
Color Depth: 30 bits, 1.07B Color (10+10+10)
Dynamic Contrast Ratio: 8,000:1
Aspect Ratio: 4:3
Lens Shift: Vertical (-10.5%/+3%) / Horizontal (+/- 3.8%)

Video Signal:

Frequency Horizontal: 15-100kHz
Frequency Vertical: 24-120Hz

Compatibility:

PC Resolution (max): Up to 1920×1080
PC Resolution (min): Up to 1920×1080

Connector:

USB 2.0 Type A(1), USB 2.0 Type B(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(3), Control (RS232)(1), HDMI 1.4(1), HDMI MHL(1), DVI-D(1), VGA In(2), VGA Out(1), Composite RCA Video In(1), S-Video In(1), RCA Audio In (L/R)(1), RCA Audio Out(1), 3D VESA(1), Wired Remote In(1), Wired Remote Out(1), 5-BNC(1)

Audio:

Internal Speakers: 7W (x2)

Power:

Voltage: 100~240VAC (Auto Switching), 50-60Hz (universal)
Consumption (max): 480W
Stand-by: <0.5W

Controls:**Physical Controls:**

Power, H/V lens shift, focus, zoom, keystone/arrow keys, left/blank, right/panel key lock, menu/exit, mode/enter, source

On Screen Display: Display, Image, Video, Audio, Basic, Advanced.

Operating Conditions:

Temperature: 41-104° F (5 – 40° C)
Humidity (non-condensing): 10-85%

Additional Hardware:

Kensington Lock Slot: 1

Weight (imperial):

Net (lbs): 18.26
Gross (lbs): 27.31

Weight (metric):

Net (kg): 8.29

Gross (kg): 12.4

Dimensions (imperial) (WxHxD):

Packaging (in.): 22.68 x 17.17 x 11.46 in.

Physical (in.): 17.51 x 12.81 x 5.82 in.

Dimensions (metric) (WxHxD):

Packaging (mm): 576 x 436 x 291 mm

Physical (mm): 445 x 325.5 x 147.8 mm.

General:

AV Control: AMX Certified, Crestron Certified

Regulations: UL, cUL, FCC, CE, EMC, CB, ROHS, REACH, SVCH, WEEE, ErP, Mexico NOM/ENERGY, PSB, RCM, CCC

PACKAGE CONTENTS: Pro9510L projector, power cable, VGA cable, laser remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).


Recycle/Disposal: Please dispose of in accordance with local, state or federal laws. UPC: 766907847918

Accessories:

HB10B, PJ-WMK-006, PRJ-EEEW-09-01, PRJ-EEEW-09-02, PRJ-EW-09-01, PRJ-EW-09-02, RLC-106, VIEWSTICK2, VIEWSYNC3.



Documents / Resources

	<p>ViewSonic Lumens Projector [pdf] Owner's Manual Lumens Projector, Pro9510L - 1024 x 768 Resolution, 6 200 ANSI</p>
---	---

References

-  [ViewSonic](#)