



Woodpeckers T-Square Time Tool Owner’s Manual

[Home](#) » [Woodpeckers](#) » Woodpeckers T-Square Time Tool Owner’s Manual 

Racold CDR Dlx Plus Electric Storage Water Heater



Contents

1 OVERVIEW

2 ADJUST THE ANGLE

3 SCRIBING GUIDES


4 CALIBRATION

5 Documents / Resources

5.1 References

6 Related Posts

OVERVIEW

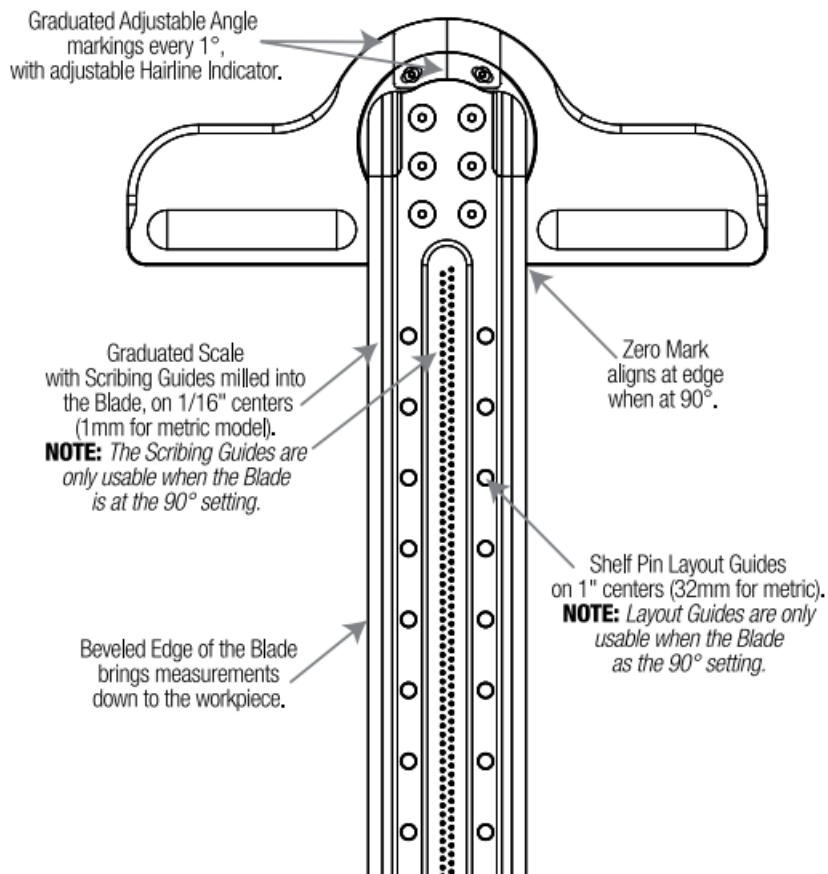

HARDWARE

- (1) Rack-It™
- (2) Rack-it Mounting Screws
- (1) 1 /16" Hex Wrench

Scan the QR code above to watch the video or visit woodpeck.com under the video tab towards the bottom of the product page.




If you think you're m1ss1ng anything, email us at mailroom@woodpeck.com.
 You can also call us at 800-752-0725 from 9:00 a.m. to 4:00 pm. EST Monday – Friday


ADJUST THE ANGLE

1. Loosen the (2) Angle Lock Knobs on the rear of the T-Square. The Angle Lock Knobs do not need to be

loosened very much, one quarter to a half turn should be more than enough. **FIGURE A.**

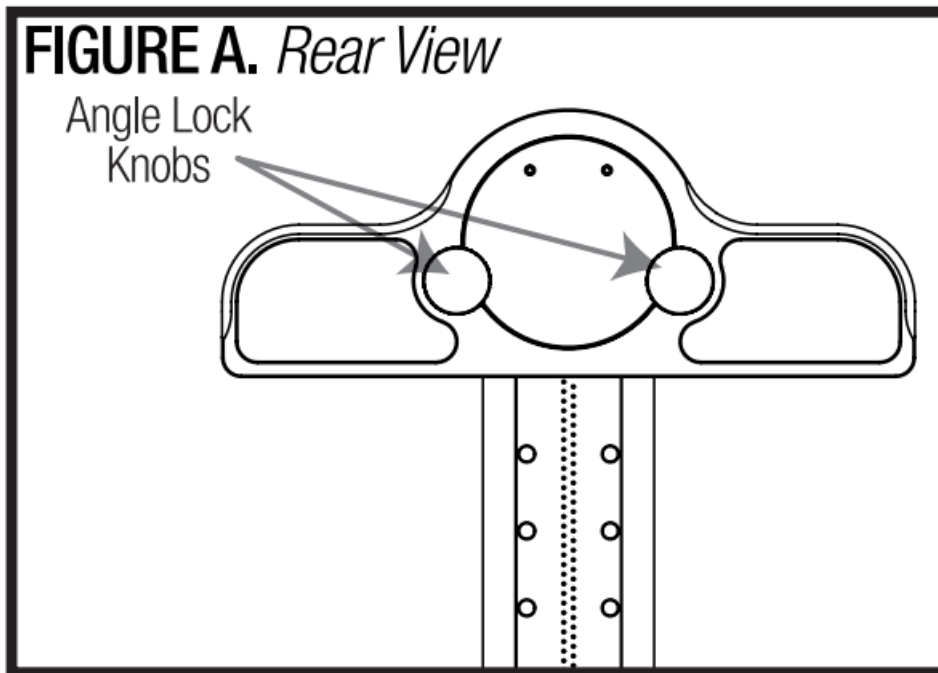


2. Rotate the Blade relative to the Protractor Head until the desired angle is achieved.
3. The angle is read from the Hairline Indicator. **FIGURE B.**

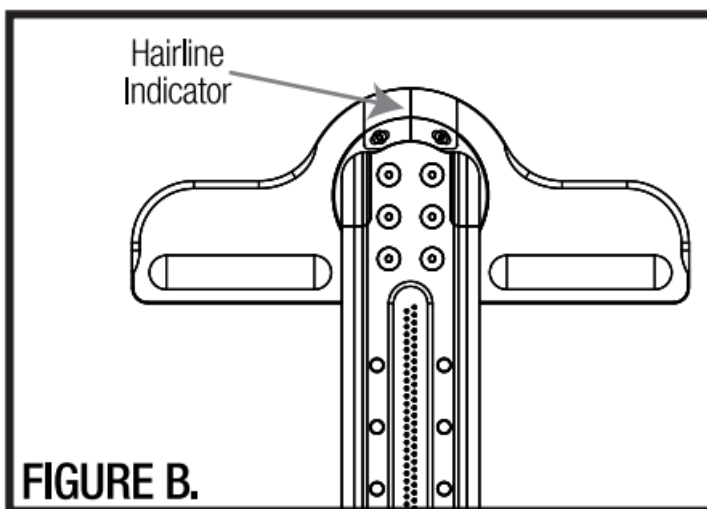


4. Re-tighten the Angle Lock Knobs to secure the angle.

Layout angles
using angle scale.

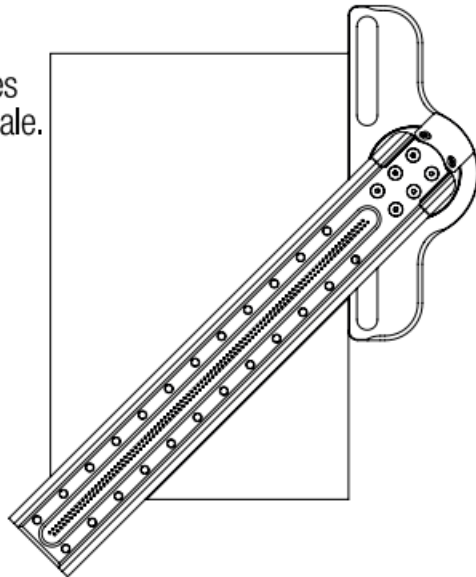

Measure angles
of workpieces.

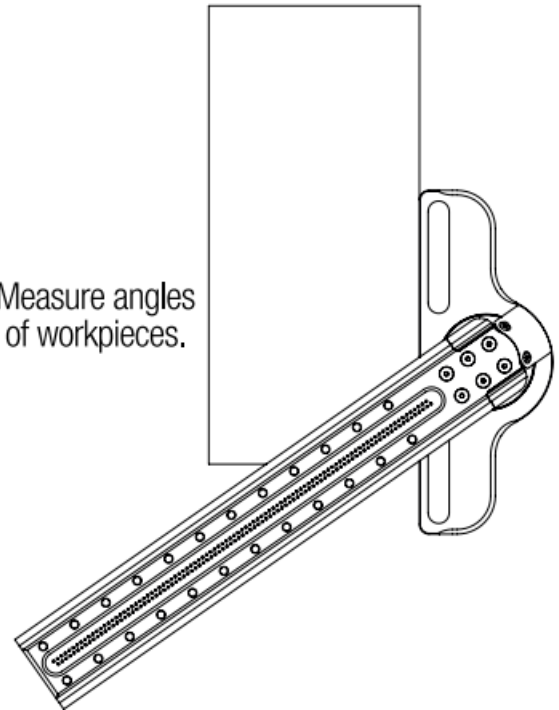

SCRIBING GUIDES

1. Set the Blade angle to 90° **NOTE:**

The Scribing Guides only function correctly when the blade is set to 90°.


2. Place a mechanical pencil in the desired hole, then slide the Head along the edge of the material while moving the marking instrument with your other hand.

CALIBRATION

The Hairline Indicator is factory calibrated on the Protractor T-Square. If the angle measurements are off, re-calibration may be necessary.

1. Begin by loosening the (2) Angle Lock Knobs on the rear of the T-Square.
2. Set the T-Square to go0 by using a known good square reference, such as a Woodpeckers 1281 Square (Sold Separately at woodpeck.com). **FIGURE B.**
3. Once set to go0 and lock the (2) Angle Lock Knobs to secure the angle. **FIGURE A.**
4. Next, loosen the (2) Button Head Screws that secure the Hairline Indicator to the pivoting core using the Hex Wrench.
5. Keep the Hairline Indicator pressed against the circular section at the top end of the Blade, and pivot until the Hairline reads exactly on the go0 line.
6. Tighten the (2) Button Head Screws on the Hairline Indicator in place.

Your Protractor T-Square is now re-calibrated.

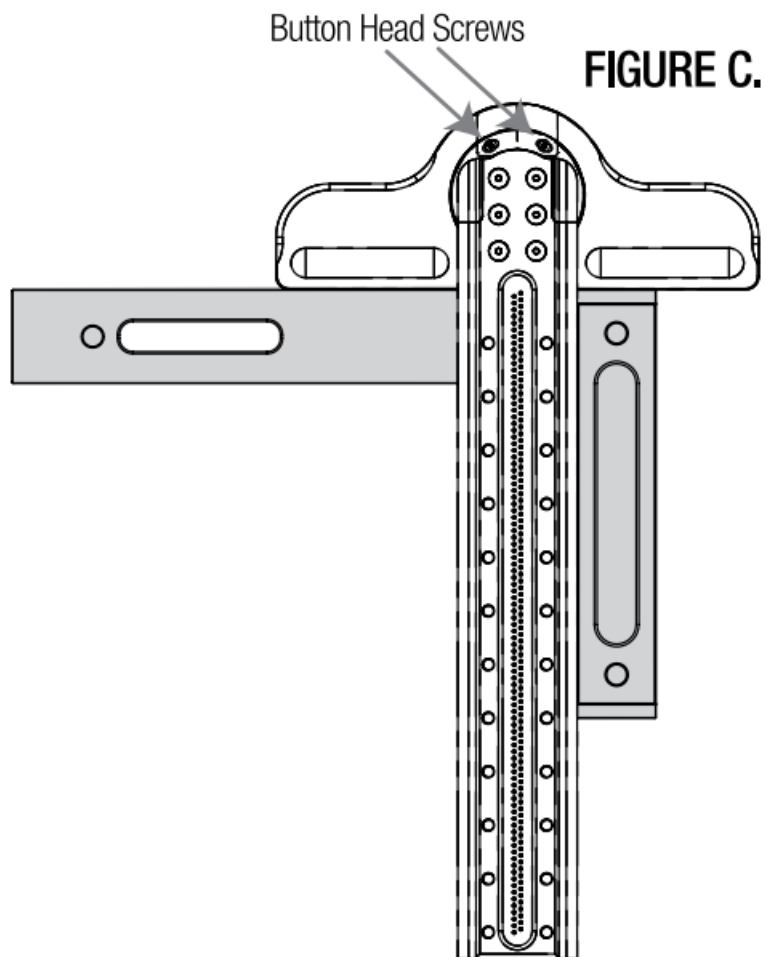

woodpeckers, LLC Strangsville, Ohio woodpeck.com
© 2023 Woodpeckers, LLC



woodpeck.com

At Woodpeckers we are constantly reviewing & improving our tools.

The most current version of our instruction manuals are always available to download at woodpeck.com.

(Located in the bottom section of the tool's page under the "**Additional Information**" or Instructions" tabs.)

eCLUB Be the first to know all the new products, One11ME Tools & sales by subscribing to our **eClub**.

(Located at the top center of our webpage woodpeck.com.)

 **YouTube** Subscribe to our YouTube channel to stay up-to-date on all the latest tool tips & tricks.



INTERACT WITH US! Follow us on Facebook, Instagram & TikTok!


Enjoy shop tips, project ideas, tool techniques & more in our Woodworking Resource Center/Blog. (Located at the bottom center of our webpage woodpeck.com.)



WARNING: This product exposé you to chemicals, including chromium , which is known to the state of California to cancer and birth defects or other reproductive harm . for more information go to www.P65Warnings.ca.gov

Woodpeckers®

Documents / Resources



[Woodpeckers T-Square Time Tool](#) [pdf] Owner's Manual
T-Square Time Tool, T-Square, Time Tool

References

- [User Manual](#)